



antique[®]
build better. build stronger.

ONE STOP SOLUTION FOR
**TILING AND
WATERPROOFING**




ABOUT US

Long lasting is slowly becoming a lesser used word by many companies. Quality has taken the back seat and has given preference to quantity. At Antique quality is our cornerstone of the business. Quality becomes even more important when you deal in complex products like Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various applications like grouting, fixing tiles, waterproofing. If your demand is quality product, Antique is the right brand for you.





Floor Tiles

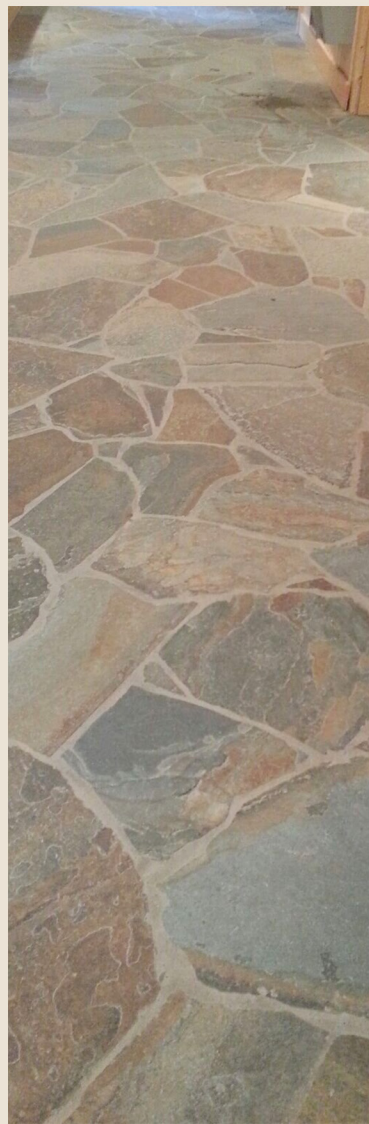

Natural Stone



Outdoor Tiles



Large Scale Tiles



Wall Tiles

APPLICATIONS

Our products are designed in a way to suit both indoor and outdoor applications. Our complex chemical mixtures ensure you have long lasting applications and peace of mind.



Adhesives for all types of tiles & natural stones



High strength grout for all types of tiles & natural stones



Wide range of colors for Epoxy grouts in solid and sparkle finishes



Heavy duty waterproofing for interior & exterior applications

WE ARE ANTIQUE

21+ YEARS OF EXCELLENCE

Antique Chemicals is your one stop shop for everything related to Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various applications like grouting, fixing tiles, waterproofing. At Antique, we have implemented world class practices that ensure our products lasts long. Bid good bye to all your worries with regards to chemicals. Say hello to a worry free future, say hello to Antique.



INDEX

TILE ADHESIVE

Copper Adhesive	10
Silver Adhesive	12
Golden Adhesive	14
Platinum Adhesive	16
Diamond Adhesive	18
PU Fix A500	20
Back Tile Primer	22
Block Jointing	24

WALL FINISH

Wall Putty	26
------------	----

TILE GROUT

Tile Grout (Tg Silver)	28
Tile Grout Golden (High Polymer)	30
Grout Admix	32
A-Poxy Grout AP-100	34
2 Part Epoxy Grout	36

WATERPROOFING


Cem Bond Aw+111	38
Super Latex 555 (SBR)	40
Damp Proof Protect	42

TILE CARE

Tile Cleaner	44
--------------	----

TILE ACCESSORIES

Tile Spacer	46
Trowel	46
Tile Lifters	46
Tile Leveling Tool	46
Tile Leveling Kit	46

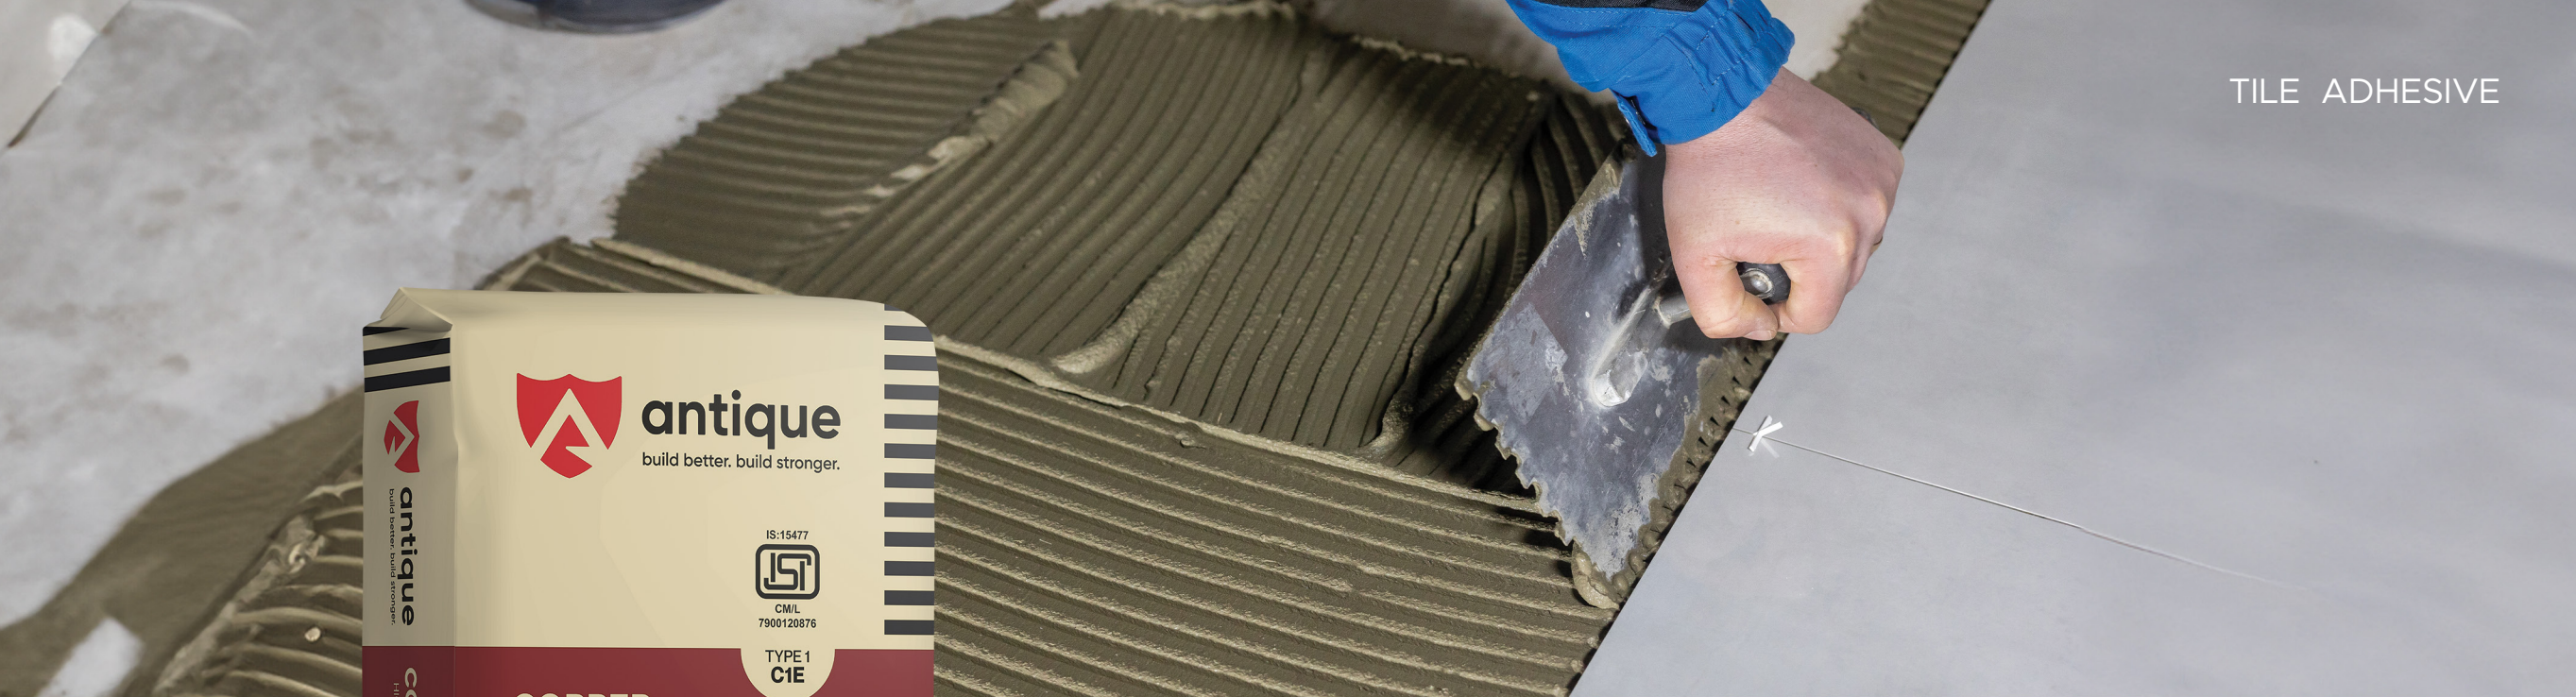

TYPE 1
C1E

PRODUCT DETAILS

Antique Copper Adhesive is a grey, high-polymer-modified, cement-based tile adhesive suitable for fixing tiles, including porcelain tiles, vitrified tiles and wall tiles, in both interior and exterior settings. For challenging applications, consider consulting Antique Chemicals for a higher-performance adhesive option.

SHELF LIFE & STORAGE

The shelf life of this product is 12 months from the date of manufacturing when unopened. Store it in a cool and dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

Appearance	Powder Grey
Mixing Ratio	4 ltr. clean water mix with 20kg
Adhesive Thickness	3 to 8mm
Open Time	15 min at 20°c
Adjustability Time Pot Life	15 min at 20°c
Shear Strength	>700 KN/m2
Tensile Strength	>500 KN/m2
Slip Resistance in mm	0 mm
Pot Life at 27°c	Approx 2 hour
Bulk Density	1.90 gm/cc

COPPER ADHESIVE

Tile fixing adhesive for Internal Floor applications.

Packaging 20kg



TYPE 2
C2T

PRODUCT DETAILS

Antique Silver Adhesive is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Antique Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

SHELF LIFE & STORAGE

The shelf life of this product is 12 months from the date of manufacturing when unopened. Store it in a cool and dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

Appearance	Powder Grey
Mixing Ratio	4 ltr. clean water mix with 20kg
Adhesive Thickness	3 to 10mm
Open Time	20 min at 20°c
Adjustability Time Pot Life	20 min at 20°c
Shear Strength	>1100 KN/m2
Tensile Strength	>700 KN/m2
Slip Resistance in mm	0 mm
Pot Life at 27°c	Approx 2 hour
Bulk Density	1.82 gm/cc

SILVER ADHESIVE

Tile fixing adhesive for Internal wall & Floor applications.

Packaging **20kg**



TYPE 2
C2TE

PRODUCT DETAILS

Antique Golden Adhesive is a cement-based adhesive for wall and floor tiles. Suitable for fixing tiles in interior and exterior situations. This is ideal for fixing tile on tile.

SHELF LIFE & STORAGE

The shelf life of this product is 12 months from the date of manufacturing when unopened. Store it in a cool and dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

Appearance	Powder Grey/White
Mixing Ratio	4 ltr. clean water mix with 20kg
Adhesive Thickness	3 to 15mm
Open Time	25 min at 20°c
Adjustability Time Pot Life	25 min at 20°c
Shear Strength	>1500 KN/m2
Tensile Strength	>1200 KN/m2
Slip Resistance in mm	0 mm
Pot Life at 27°c	Approx 2 hour
Bulk Density	1.82 gm/cc

GOLDEN ADHESIVE

Tile fixing adhesive for Internal & External wall & Floor applications.

Packaging 20kg



TYPE 3
C2TES1

PRODUCT DETAILS

Antique Platinum Adhesive is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic etc. It is also suitable for fixing ceramic, vitrified wall & floor tiles, marble, granite and other natural stone in interior and exterior locations which includes use in swimming pools. This is ideal for fixing tile on tile.

SHELF LIFE & STORAGE

The shelf life of this product is 12 months from the date of manufacturing when unopened. Store it in a cool and dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

Appearance	Powder Grey/White
Mixing Ratio	4 ltr. clean water mix with 20kg
Adhesive Thickness	3 to 18mm
Open Time	30 min at 20°c
Adjustability Time Pot Life	30 min at 20°c
Shear Strength	>2000 KN/m2
Tensile Strength	>1600 KN/m2
Slip Resistance in mm	0 mm
Pot Life at 27°c	Approx 2 hour
Bulk Density	1.75 gm/cc

PLATINUM ADHESIVE

Tile fixing adhesive for Internal & External wall & Floor applications.

Packaging **20kg**



DIAMOND ADHESIVE

Tile fixing adhesive for Internal & External wall & Floor applications.

Packaging **20kg**

TYPE 4 C2TES2

PRODUCT DETAILS

Antique Diamond Adhesive is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic etc. It is also suitable for fixing ceramic, vitrified wall & floor tiles, glass tiles, marble, granite, quartz stone, terrazzo and other natural stone in interior and exterior locations which includes use in swimming pools. This is ideal for fixing tile on tile.

SHELF LIFE & STORAGE

The shelf life of this product is 12 months from the date of manufacturing when unopened. Store it in a cool and dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

Appearance	Powder Grey/White
Mixing Ratio	6 ltr. clean water mix with 20kg
Adhesive Thickness	3 to 25mm
Open Time	30 min at 20°C
Adjustability Time Pot Life	30 min at 20°C
Shear Strength	>3500 KN/m2
Tensile Strength	>2900 KN/m2
Slip Resistance in mm	0 mm
Pot Life at 27°C	Approx 2 hour
Bulk Density	1.50 gm/cc



TYPE 5
R2T

PU FIX A500

Modified Polyurethane
Multi-purpose Adhesive For Tiles & Stone

Packaging **4kg**

PRODUCT DETAILS

Antique PU Fix A500 is a high-strength polyurethane epoxy-based adhesive used to fix a wide range of materials such as metal, plywood, cement boards, and engineered stones. This adhesive is formulated for specialized application on a highly-flexible and diverse range of substrates for fixing tiles and stones. Its unique hybrid technology of PU-Epoxy makes it the best in class in the market. The ultimate adhesive to fix anything on anything.

APPLICATION PROCEDURE

Mix base and hardener properly and then applied.

ADVANTAGES

- Suitable for fixing vitrified tile for Floor & Wall
- Two part Epoxy reactive adhesive
- Very good strength
- Used for spot bonding
- Excellent squeezability
- Fast cure

Appearance	Paste
Colour	White
Shear Strength	>7 N/mm ² @28 Days
Tensile Strength	>3 N/mm ² @28 Days



BACK TILE PRIMER

Water Based Solvent Free
Acrylic Dispersion Primer

Packaging **1kg**



PRODUCT DETAILS

Antique Back Tile Primer is a water based solvent free, acrylic dispersion primer. Use a primer or bonding agent prior to the application of any of the tiles and marbles with or before use adhesive.

WHY TO USE

Now a days with advanced tiles manufacturing technology tiles are made slim & grip behind the tiles gates reduce due to that we are facing problem of de-bonding of tiles with adhesives as well as cement. So for this problem Antique has developed a new product for the better adhesion of adhesive with the tiles.

FEATURES

Easy to use single component high adhesion can be used for marble & granite. Also highly economical and self curing.

METHOD OF APPLICATION

Apply Antique Back Tile Primer back side of the tiles or marble with the help of brush or spray. It apply the adhesive layer on the tile primer before the Back Tile Primer gets dry. Then apply the adhesive on the wall or floor where the tile is to be layed. Apply the tile on the surface and gently twist the tile for the better bonding.

All tiles back wash (white powder) should be removed with the help of white brush and then washed with the water.



BLOCK JOINTING

Material for joining AAC blocks.

Packaging **20kg**

PRODUCT DETAILS

Antique Block Jointing is a factory prepared blend of carefully selected raw materials, Portland cement, graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar ideal for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness that meet and exceed the requirements of National and International Standards.

APPLICATION

For interior and exterior use for preparing thin bed block mortar for AAC and cellular concrete blocks.

ADVANTAGES


1. Long working time
2. No curing required after block work is done
3. Fast & economical
4. Improved adhesion between two blocks

COVERAGE

Approximately 100-130sq.ft. per 20kg bag. Coverage is based on smoothness and evenness of the substrate, size of blocks used and the thickness of mortar used. A general guideline for coverage of mortar is given when used with 25% water added to powder.

Appearance	Powder Grey
Water Demand	25 to 30%
Compressive Strength	>15 N/mm ² @28 Days
Tensile Strength	>0.8 N/mm ² @28 Days
Hard Dry	24 hour
Pot Life	Approx 2 hour

Note: Coverage is based on the block size of 600mm* 200mm* 100mm

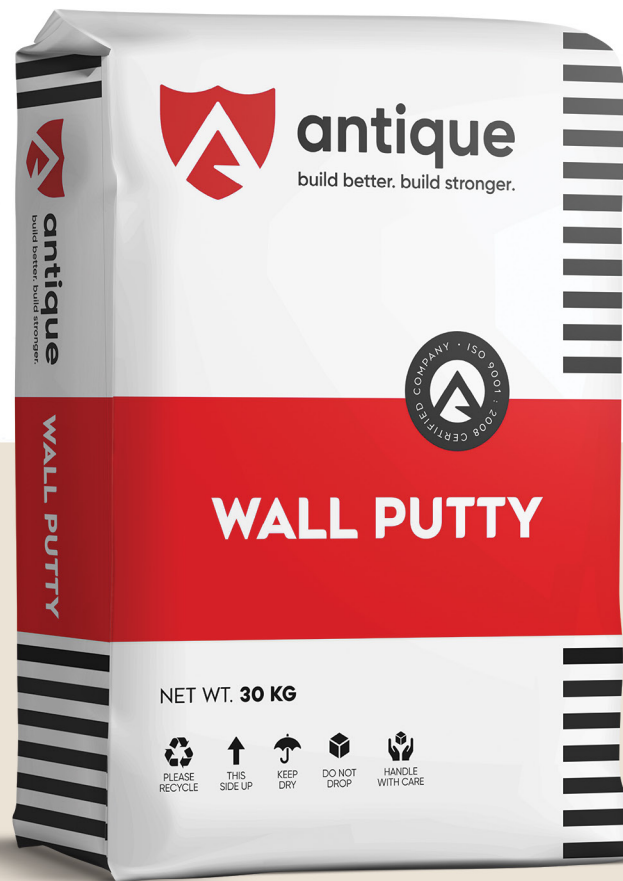

WALL PUTTY

Polymer & White Cement based Smooth Putty

Packaging **30kg**



PRODUCT DETAILS

Antique Wall putty is a cementitious substance that is designed and manufactured to even out surfaces to make them ready to be painted. This product is used for filling cracks and pores of different kinds. Antique offers first-rate wall putty that helps you achieve a smooth and protective surface for painting surfaces. Secondly, due to its color and other properties, it makes it easy to apply all sorts of colors to the walls.

ADVANTAGES

- Easy to apply wall
- White smooth & finish putty
- Does not allow paint to flake
- Protects paint from moisture
- Curing is not required
- Ideal for interior & exterior walls

SUITABLE SURFACE

- Highly water
- Resistant
- Excellent
- Workability UV
- Resistance
- Strong bonding
- Economical & easy to use

MIXING RATIO

Add 200 ml to 300 ml of water for 1 kg.

COVERAGE

15 to 20 sq. ft. per 1 kg for 2 coats, maintaining a maximum thickness of 0.75 mm to 1.5 mm on smooth plaster surface.



TILE GROUT (TG SILVER)

One Pack Water Resistant Tile Grout

Packaging **500gm | 1kg**



PRODUCT DETAILS

Antique Tile Grout (TG Silver) is a high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc.

(Note: where chemical resistance is hygienic and sterile, it is important use Epoxy Grout)

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLORS



Pot life at 30°	120 min.
Open time	30 min.
Adjustability	30 min.
Initial setting time	4-6 hrs.
Final setting time	8-10 hrs.
Shrinkage	<0.1%



TILE GROUT GOLDEN (HIGH POLYMER)

One Pack Water Resistant Tile Grout
and Mild Acid-proof

Packaging **1kg**

PRODUCT DETAILS

Antique Tile Grout Golden(High Polymer) is a high quality fine, high-polymer modified, high performance Golden Tile Grout with excellent water-resistance, efflorescence resistance designed for grouting glazed tiles / mosaics, vitrified & fully vitrified tiles, ceramic tiles, industrial tiles, granites, marbles & other natural stones etc. Golden Tile Grout has higher strength, is water and stain resistant compared to normal cement grout.

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLORS



Pot life at 30°	120 min.
Open time	35 min.
Adjustability	35 min.
Initial setting time	4-6 hrs.
Final setting time	8-10 hrs.
Shrinkage	<0.05%



GROUT ADMIX

For better strength of Grout

Packaging **200ml**

PRODUCT DETAILS

Antique Grout Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout.

Applications

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

BENEFITS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistant
- Reduces water absorption
- Easy to clean

COVERAGE

Varies as per application.



A-POXY GROUT AP-100

Stain free grout for Floor & Wall (3 Part)

Packaging **1kg | 5kg**

PRODUCT DETAILS

Antique A-Poxy Grout Ap-100 is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

FEATURES

Stain free, color fast, Easy to install and clean, Water cleanable when fresh, Non-cracking or powdering, Anti-bacterial and Anti-fungal chemical & temperature resistance, Easy maintenance, Available in range, Hard & durable joint, High strength & versatile, Waterproof.

COVERAGE ESTIMATES

Consumption depends on Joint width, Size of tiles and good workmanship.

APPLICATION AREAS

Walls, Floors, interiors, Exterior, Dry & Wet areas, Work tops, Showers, Swimming Pools, Heavily trafficked floors, Hygienic sterile chemical resistance areas, hydrotherapy pools.

Joint width	2 to 25mm
Gel time	60 min.
Setting time	8 to 12 hrs.
Specific gravity	1.75
Water absorption	Nil



2 PART EPOXY GROUT

Stain free grout for Floor & Wall (2 Part)

Packaging **1kg | 5kg**

PRODUCT DETAILS

Antique 2 Part Epoxy Grout is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

FEATURES

Stain free, color fast, Easy to install and clean, Water cleanable when fresh, Non-cracking or powdering, Anti-bacterial and Anti-fungal chemical & temperature resistance, Easy maintenance, Available in range, Hard & durable joint, High strength & versatile, Waterproof.

COVERAGE ESTIMATES

Consumption depends on Joint width, Size of tiles and good workmanship.

APPLICATION AREAS

Walls, Floors, interiors, Exterior, Dry & Wet areas, Work tops, Showers, Swimming Pools, Heavily trafficked floors, Hygienic sterile chemical resistance areas, hydrotherapy pools.

Joint width	2 to 25mm
Gel time	60 min.
Setting time	8 to 12 hrs.
Specific gravity	1.75
Water absorption	Nil



CEM BOND AW+111

Integral Liquid Water Proofing Compound For
Concrete & Plaster (Add Mixture)

Packaging **200ml | 1ltr | 5ltr | 20ltr**

PRODUCT DETAILS

Antique Cem Bond AW+111 is a specially formulated integral liquid waterproofing compound composed of surface active plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

APPLICATIONS

Areas of Application Waterproofing of
concrete and sand-cement mortars used in

- Basements
- Roof slabs and screeds
- Water tanks & water retaining structures
- External plastering
- Bathrooms and balconies
- Sumps and drains

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of
manufacturing in unopened condition.
Store in a cool & dry place.

DOSAGE

100 to 300 ml per 50 kg bag of
cement.

METHOD OF APPLICATION

- Charge cement & aggregates to concrete mixer as per the mix design, mix in dry state for 1-2 minutes.
- Start addition of 75-80% mixing water & mix for 2-3 minutes.
- Antique Cem Bond AW+111 is added as per the recommended dosage into the remaining mixing / gauging water, then add to concrete mixer & mix for another 2 minutes.
- Place the concrete or apply plaster, as needed.
- Cure the applied mortar or concrete as per good construction practices.



PRODUCT DETAILS

Antique Super Latex 555(SBR) is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

TECHNICAL INFORMATION

- Type - Styrene Butadiene Polymer Liquid
- Color - White
- Specific Gravity - 1.02 + 0.02
- Storage Condition - Free from frost
- Solid Content - 44 + 1 %
- For best result - Use before 1 year if unopened Consumption - 1ltr of Antique Super Latex 555 will cover 70 - 80 sq. ft. area in 2 coats for a proportion mix 1:4:7 (Antique Super Latex 555 : Water : Cement)

SUPER LATEX 555 (SBR)

Super Latex for Waterproofing & Repairs

Packaging **250ml | 1ltr | 5ltr | 20ltr**



DAMP PROOF PROTECT

Single Component Acrylic Polymer

Packaging **1ltr** | **5ltr** | **20ltr**



PRODUCT DETAILS

Antique Damp Proof Protect Is A glass fiber reinforced elastomeric liquid applied waterproofing membrane. Damp Proof Protect upon curing, forms a thick, seamless, durable membrane thus offering ultimate waterproofing.

APPLICATION AREA

- Roofs, terraces and balconies as a sandwich layer
- Pools and fountains
- Reservoirs and channels
- End walls subjected to rain, Exterior walls

ADVANTAGES

- Ease in application
- Excellent adhesion to most of the exterior surfaces
- Balanced mechanical properties
- Gives excellent water resistance

COVERAGE ESTIMATES

For RCC or plaster application using a brush or roller, the recommended coverage is as follows:

- On horizontal surfaces, the coverage is approximately 10 sq.ft/liter.
- On vertical walls, the coverage is approximately 20 sq.ft/liter for a single coat.



TILE CLEANER

Heavy Duty Tiles Cleaner

Packaging **500ml | 1 ltr**

PRODUCT DETAILS

Antique Tile Cleaner is a powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

AREAS OF APPLICATIONS

- Interior & Exterior
- Wall & Floor

BENEFITS

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Remove efflorescence and most oxide stains.

NOTE

Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.

ACCESSORIES

Tile Spacer



Available in
2, 3, 4, 5, 6, 8 and 10mm

Tile Lifters



Tile Leveling Tool



Tile Leveling Kit


Wedges



Clip



GLOBAL PRESENCE

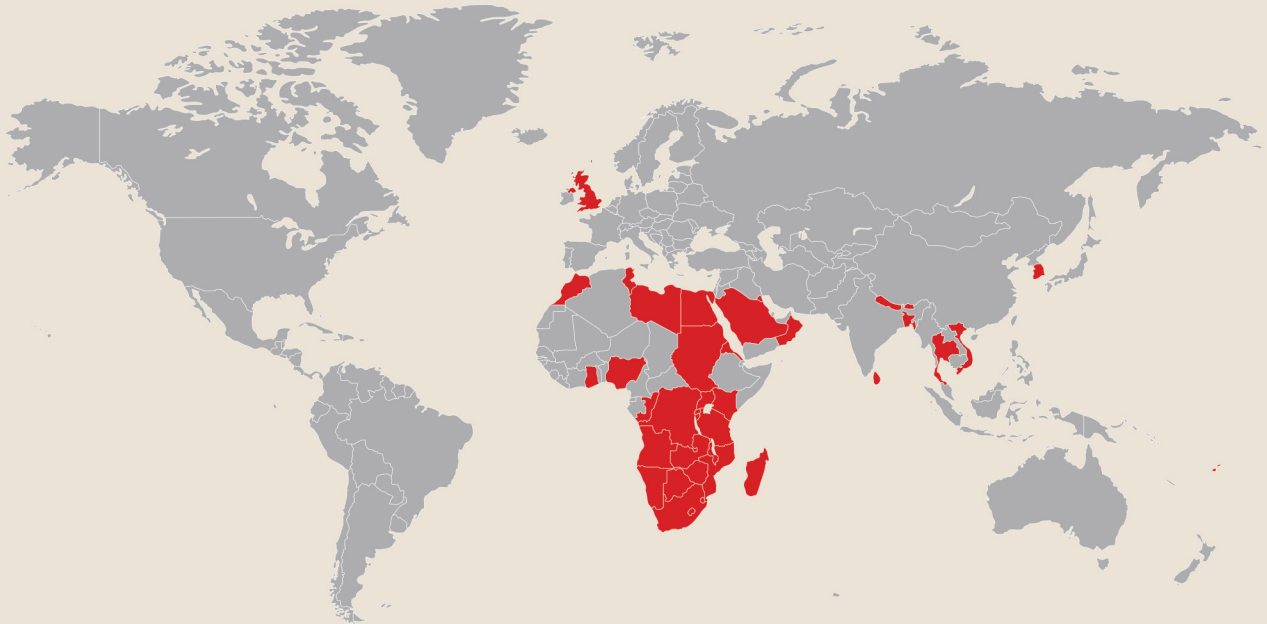

- | | | | |
|-------------|----------|------------|--------------|
| Africa | Dubai | Bangladesh | Vietnam |
| Fiji | Srilanka | Bhutan | Thailand |
| Oman | Maldives | Nepal | Saudi Arabia |
| South Korea | UK | Kuwait | |



antique®

build better. build stronger.

Antique Designer Tiles

Plot No. 02, Rafaleshwar G.I.D.C.,
8-A national highway rafaleshwar,
morbi - 363 642, gujarat, india.

mail: info@antiquegroup.in

website: www.antiquegroup.in

Customer Care: 1800 123 3220