


MINIMAL WINDOWS MAXIMUM VIEW !



AZ WINDOWS PRIVATE LIMITED

Giriraj Industrial Park, Sr No. 35/4 P4, Plot No 4, Nr. Vittoria Design,
B/h Markwell, Rajkot - Gondal National Highway, Pipaliya, Rajkot - 360311, Gujarat India.

+91 99096 77000 | info@azwindows.in | www.azwindows.in



EDITION 2026/27



INSIDE OUTSIDE LIVING.

CRAFTED FOR RELIABILITY AND PRECISION

AZwindows delivers high-quality aluminum systems designed with expert engineering and tailored to meet diverse project needs. Our solutions provide long-lasting performance with minimal maintenance.

SUSTAINABLE, SAFE, AND BUILT TO LAST

Our aluminum profiles are non-flammable, colorfast, and fully recyclable. With exceptional stability and load-bearing capacity, they accommodate large panels and versatile glass configurations, ideal for ambitious designs.

UNCOMPROMISING QUALITY AND WEATHER RESISTANCE

Whether windows, doors, or sliding systems, AZwindows offers top-tier security, durability, and flawless functionality under any conditions. Our weather-resistant solutions ensure enduring value with minimal upkeep.

DESIGN FREEDOM WITH PREMIUM FINISHES

AZwindows gives designers the freedom to customize with a variety of powder-coated and anodized finishes, bonded seamlessly to the surface. Elevate any space with elements that combine aesthetics, security, and identity.



WHAT SETS US APART



LIGHTWEIGHT EFFICIENCY

Aluminum's specific weight of 2.7 g/cm^3 — one-third that of steel — reduces dead weight in vehicles, enhancing load capacity, comfort, and energy efficiency.



EXCEPTIONAL CORROSION RESISTANCE

Natural corrosion resistance makes aluminum ideal for moisture-exposed environments. Treatments like anodizing and painting further enhance durability.



SUPERIOR REFLECTIVITY

Aluminum efficiently reflects light and heat, making it perfect for light fittings and roofing. Coated roofs can reflect up to 95% of sunlight, improving energy efficiency.



NON-MAGNETIC PROPERTIES

Its non-magnetic nature is ideal for electrical shielding in applications such as computer disks and dish antennas.




SOUND AND SHOCK ABSORPTION

Aluminum effectively absorbs sound, making it suitable for ceilings and automotive bumpers, enhancing safety and durability.



100% RECYCLABLE AND ENERGY-EFFICIENT

Aluminum is fully recyclable without quality loss, requiring only 5% of the energy needed for new production, making it an eco-friendly choice.



“INSTEAD OF FRAMING
A VIEW WITH A WINDOW,
THE ENTIRE WALL
TRANSFORMS INTO
A BREATHTAKING VIEW.”



INDEX

SLIDING SERIES

AZ 19 PRO MINIMAL	07
AZ 17 MINIMAL	09
AZ 14 ULTRA SLIM	17
AZ 25 GULF SERIES	23
AZ 34 PANORAMA	29
AZ 30 SKY FRAME	31
AZ 15 SLIM	35
AZ 20 PRIME	43
AZ 25 GRILLED	49

CASEMENT SERIES

AZ 59 MM FINELINE	53
AZ W40 CASEMENT	55
AZ W45 CASEMENT	57
AZ W50 CASEMENT	59
AZ D50 CASEMENT	61
AZ 82 GRILLED	63
AZ 114 GRILLED	65






AZ 70 SLIDING – FOLDING	67
-------------------------	----

AZ ALUMINIUM LOUVERS	69
----------------------	----

AZ 20 FACADE	71
--------------	----



A Z 19 P R O M I N I M A L

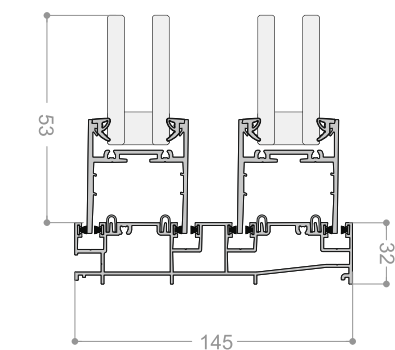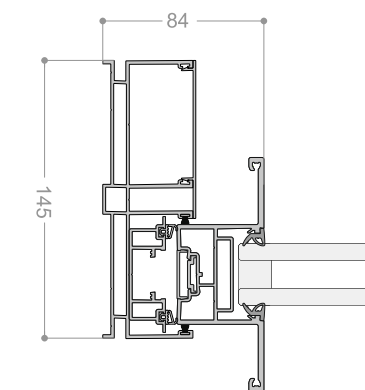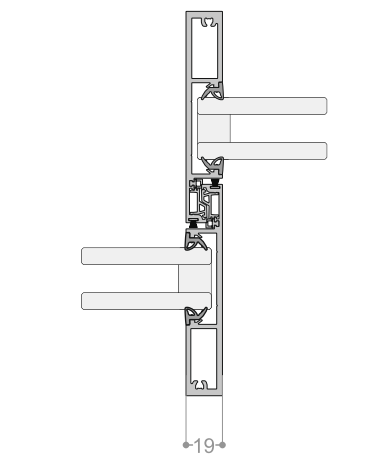

SLIDING SECTION

Profile alloy	6063
Glass thickness	Min 28 mm Max 40 mm
Max Height/Shutter	6000 mm
Max Weight/Shutter	800 kg
Multi Locking	Yes
Hidden Bottom	Yes
Center Opening	Yes
Roller Bearings	S.S. 304 Grade
Stainless Steel Rail	S.S. 304 Grade
Frame Height	32 mm
Frame Width (2T)	145 mm
Frame Width (3T)	223 mm
Multiple Track Option	YES
Sightline At Interlock	19 mm
Sound Insulation	40 db
Wind Load Resistance	Up To 3 Kpa
Air Permeability	400 Pa
Water Tightness	450 Pa

SLEEK LINES, ENDLESS VIEWS.




A Z 1 7 M I N I M A L

AZ 17 Minimal redefines elegance with its sleek profile, maximizing views and bringing sophistication to any space




HIDDEN FRAME, **BOLD STYLE**

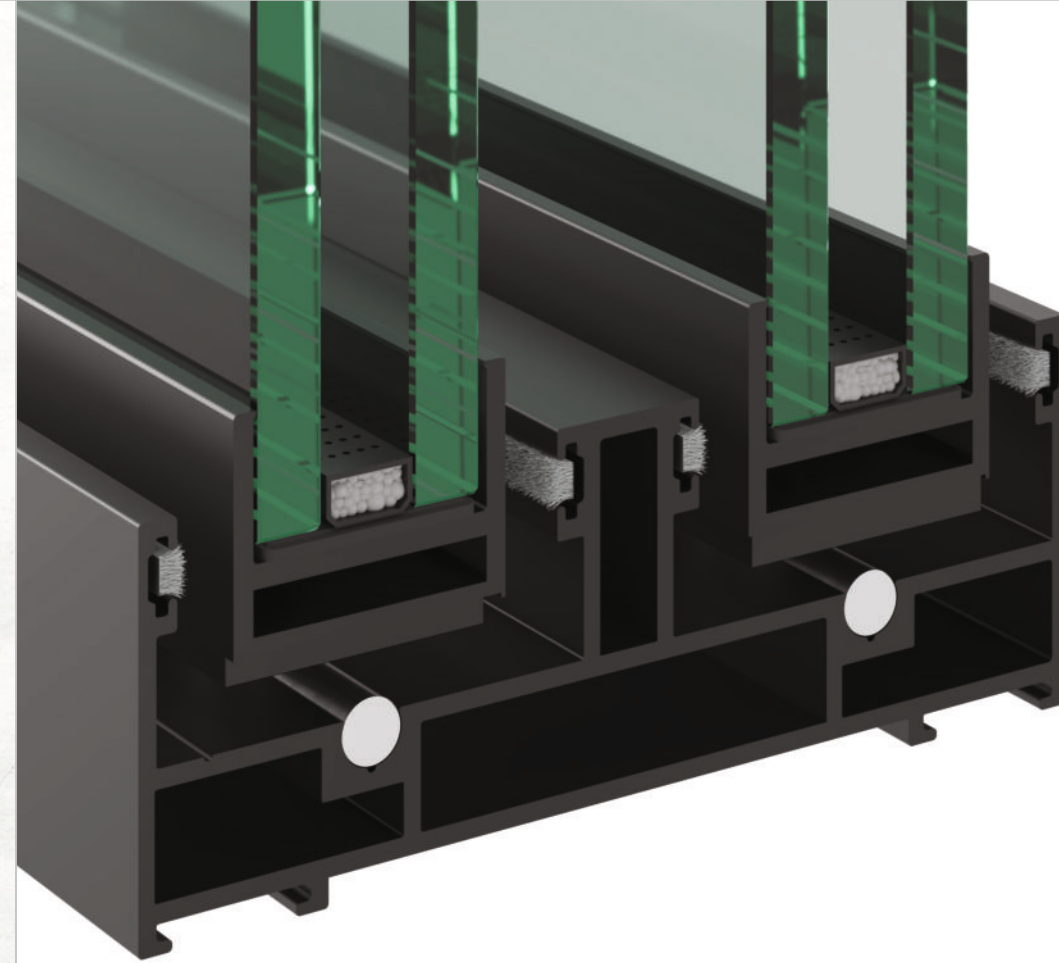






BOTH SIDE CONCEALED, OUT SIDE DRAINER

Designed for seamless movement, it delivers a flawless, secure experience in every use.

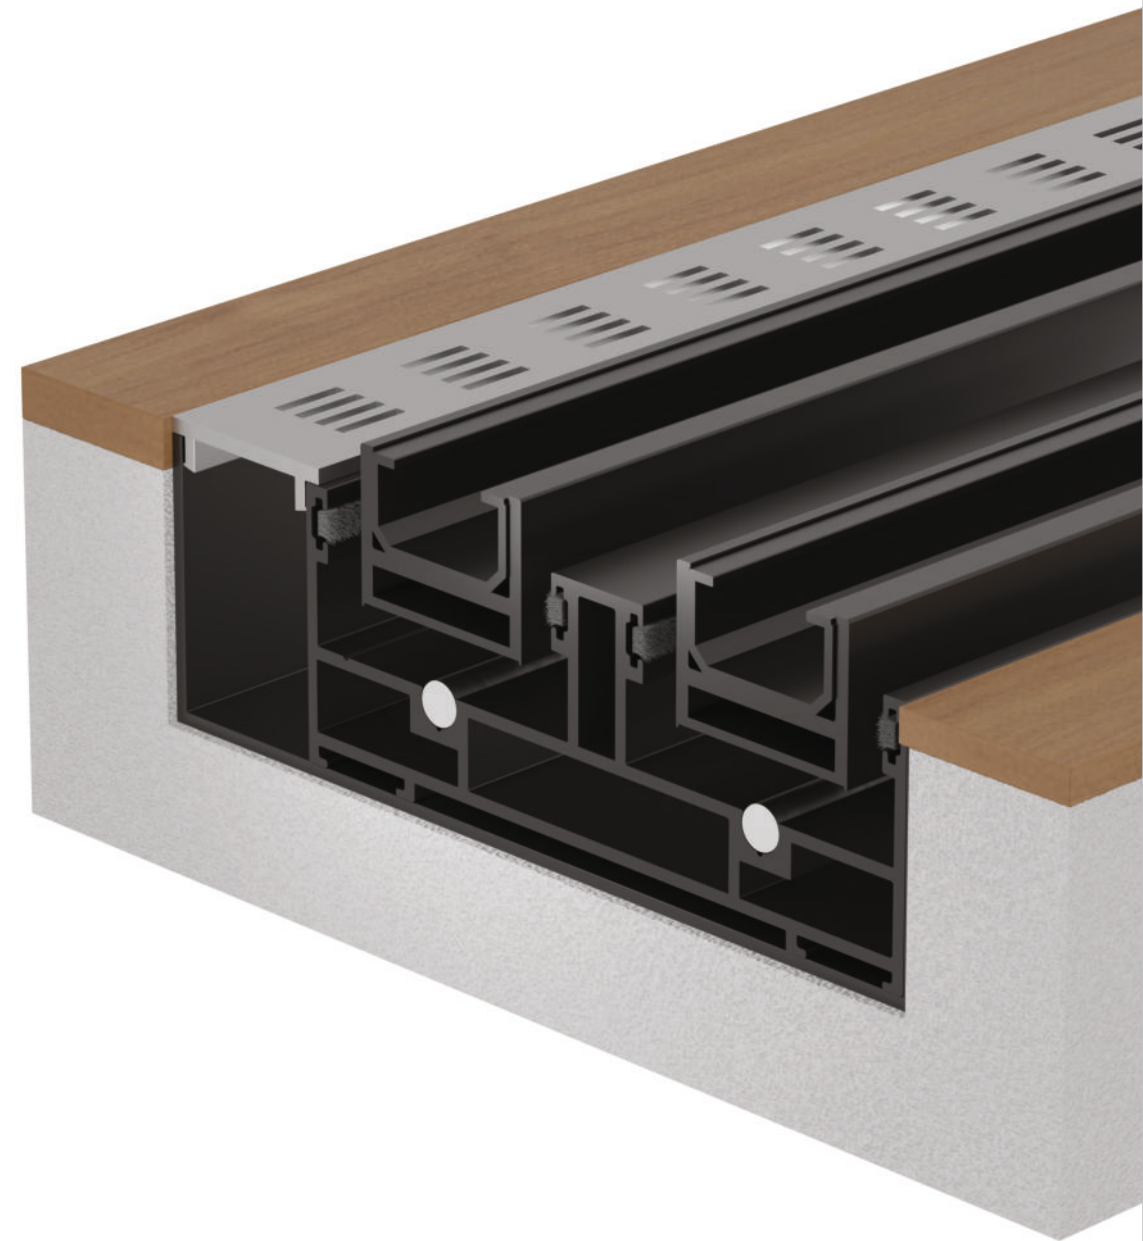

AZ 17 MINIMAL

INTERLOCK

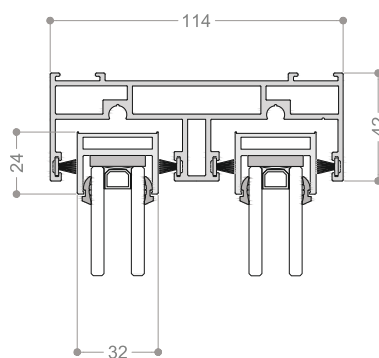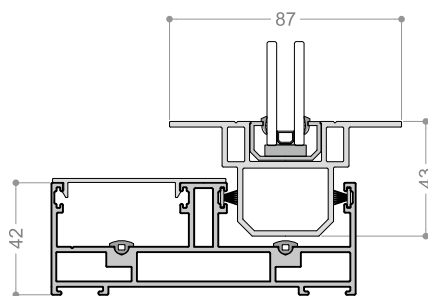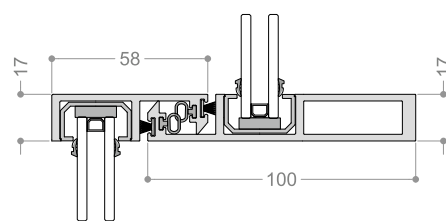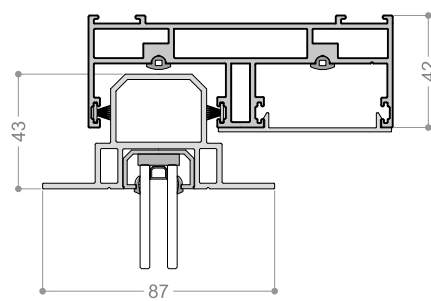

SLIDING SECTION

Profile alloy 6063

Glass thickness Min 12mm / Max 26mm

Max Height/Shutter 5200 mm

Max Weight/Shutter 700 kg

Multi Locking Yes

Mosquito Mesh Solution Yes

Hidden Bottom Yes

Corner Opening Yes

Roller Bearings (320 KG/ Per Bearing) S.S. 304 Grade

Stainless Steel Rail S.S. 304 Grade

Frame Height 42 mm

Frame Width (2T) 114 mm

Frame Width (3T) 175 mm

Sightline At Interlock 17 mm

Sound Insulation 35 db

Wind Load Resistance Up To 2.5KPa

Air Permeability 300Pa

Water Tightness 390 Pa



PANORAMIC VIEWS,
MINIMALIST DESIGN.

ULTRA SLIM, MAXIMUM ELEGANCE.




A Z 1 4 U L T R A S L I M


AZ 14 Ultra Slim combines a sleek 14mm profile with modern aesthetics, enhancing any space with style and clarity.

AZ 14 ULTRA SLIM






INTER LOCK

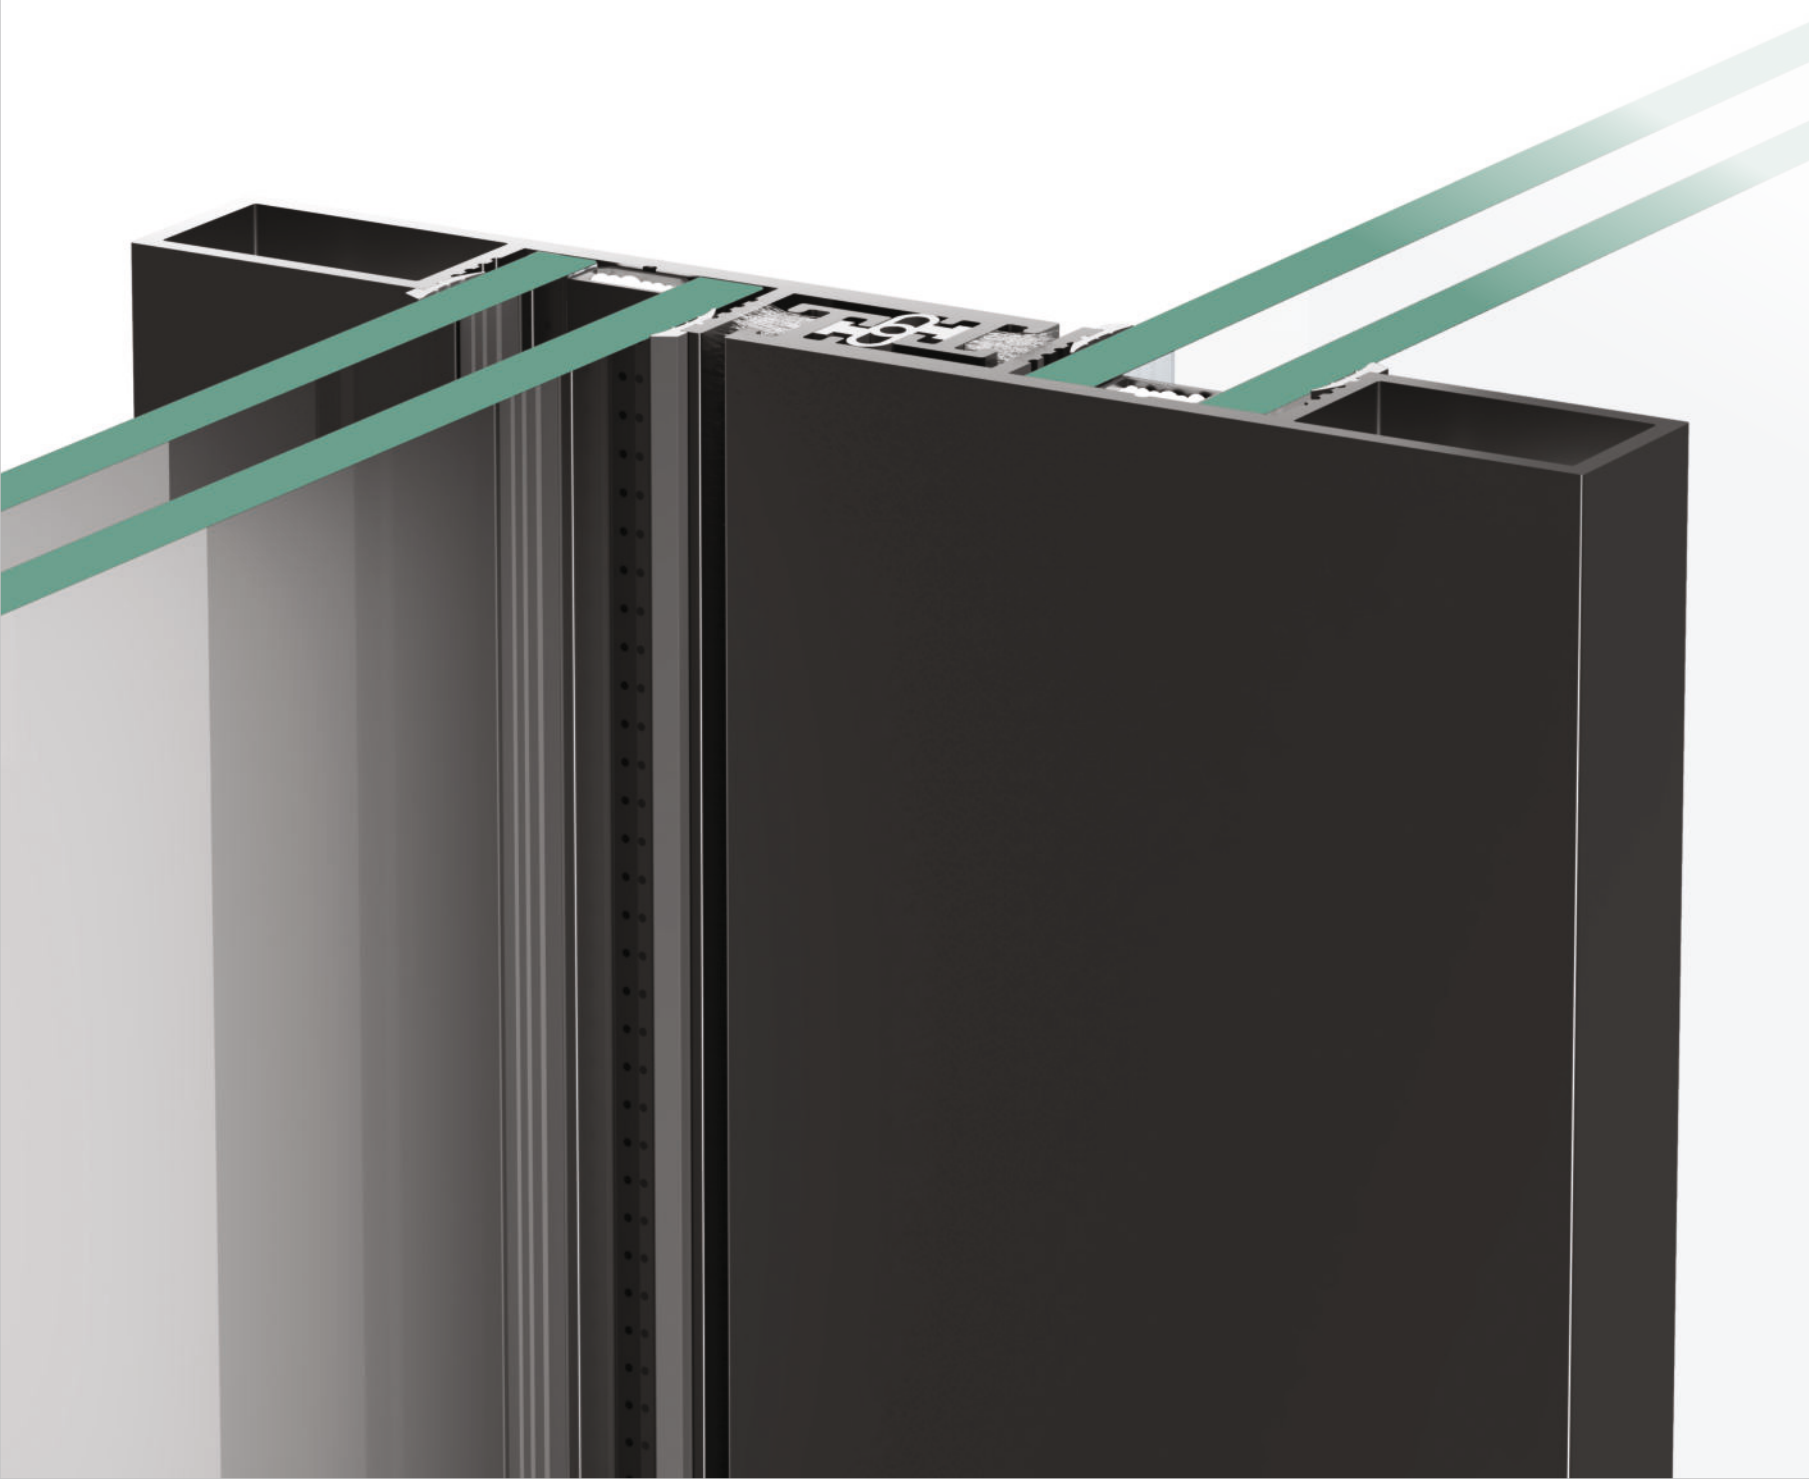

SOPHISTICATED SIMPLICITY, UNMATCHED VIEW.

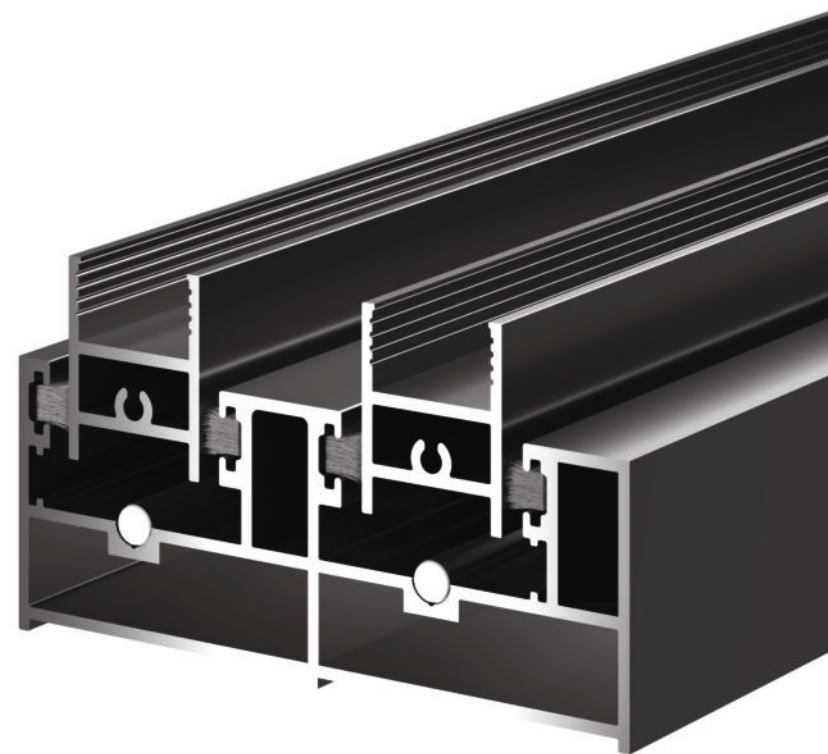

AZ 14 Ultra Slim combines a 14mm ultra-slim profile with double sided concealment for a clean, sophisticated finish.

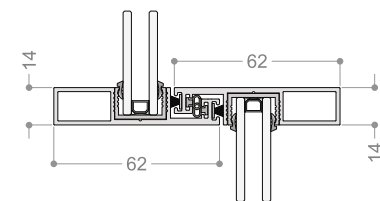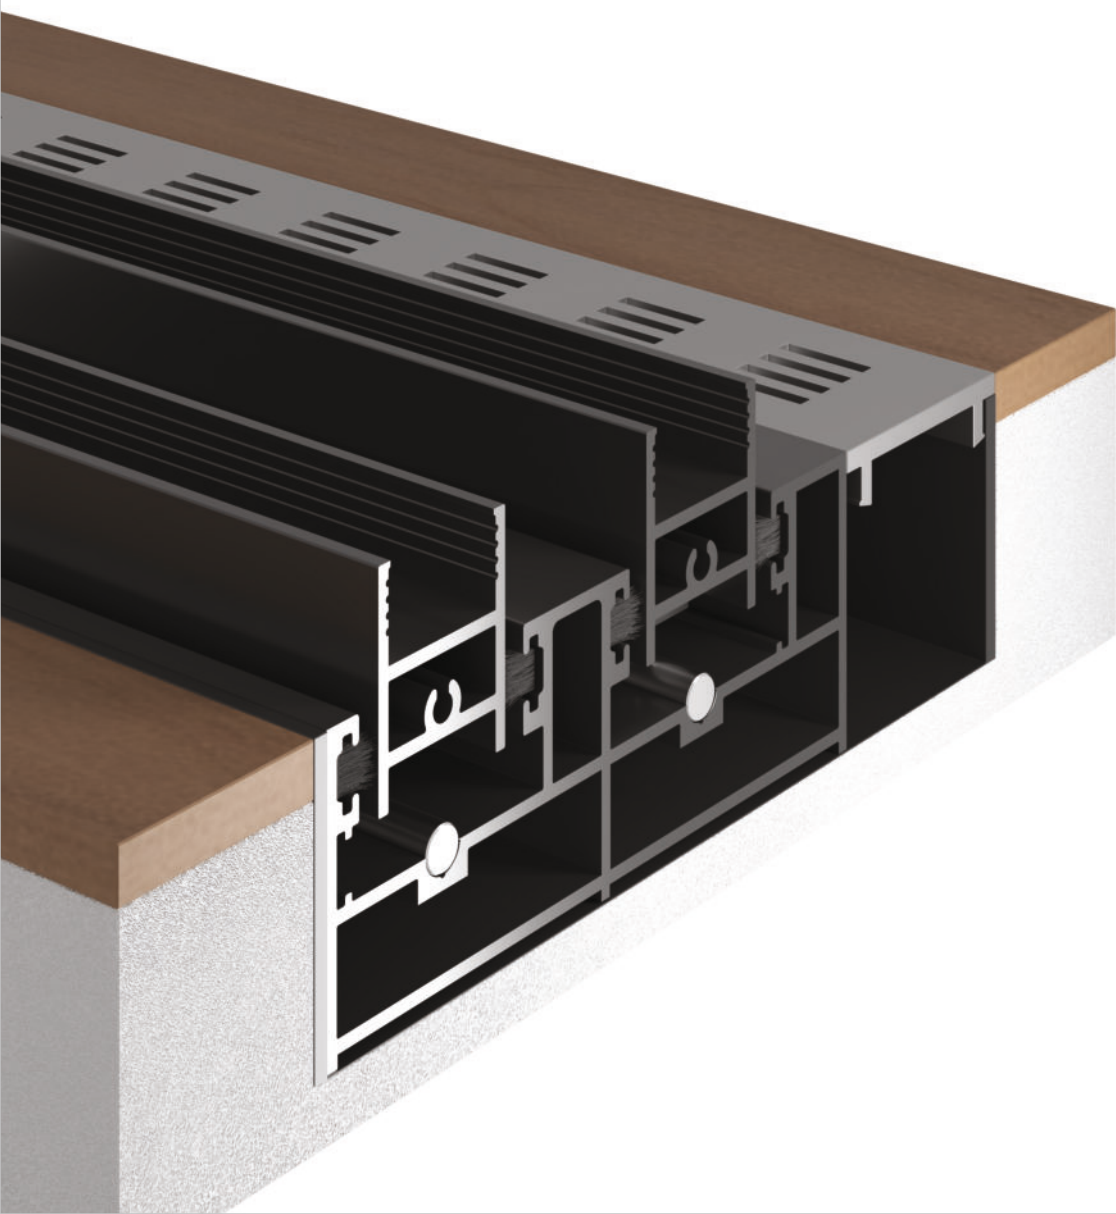

SLIDING SECTION

Profile alloy	6063
Glass thickness	10mm, 11.52mm, 12mm, 13.52mm
Max Height/Shutter	3600 mm
Max Weight/Shutter	400 kg
Multi Locking	Yes
Mosquito Mesh Solution	Yes
Hidden Bottom	Yes
Corner Opening	Yes
Roller Bearings (320 KG/ Per Bearing)	S.S. 304 Grade
Stainless Steel Rail	S.S. 304 Grade

Frame Height	33 mm
Frame Width (2T)	86 mm
Frame Width (3T)	129 mm
Sightline At Interlock	14 mm


Sound Insulation	35 db
Wind Load Resistance	Up To 2.5KPa
Air Permeability	300Pa
Water Tightness	390 Pa

REFINED DESIGN, LASTING DURABILITY.




A Z 2 5 G U L F S E R I E S

Made for high-end living, this window blends modern sophistication with exceptional strength

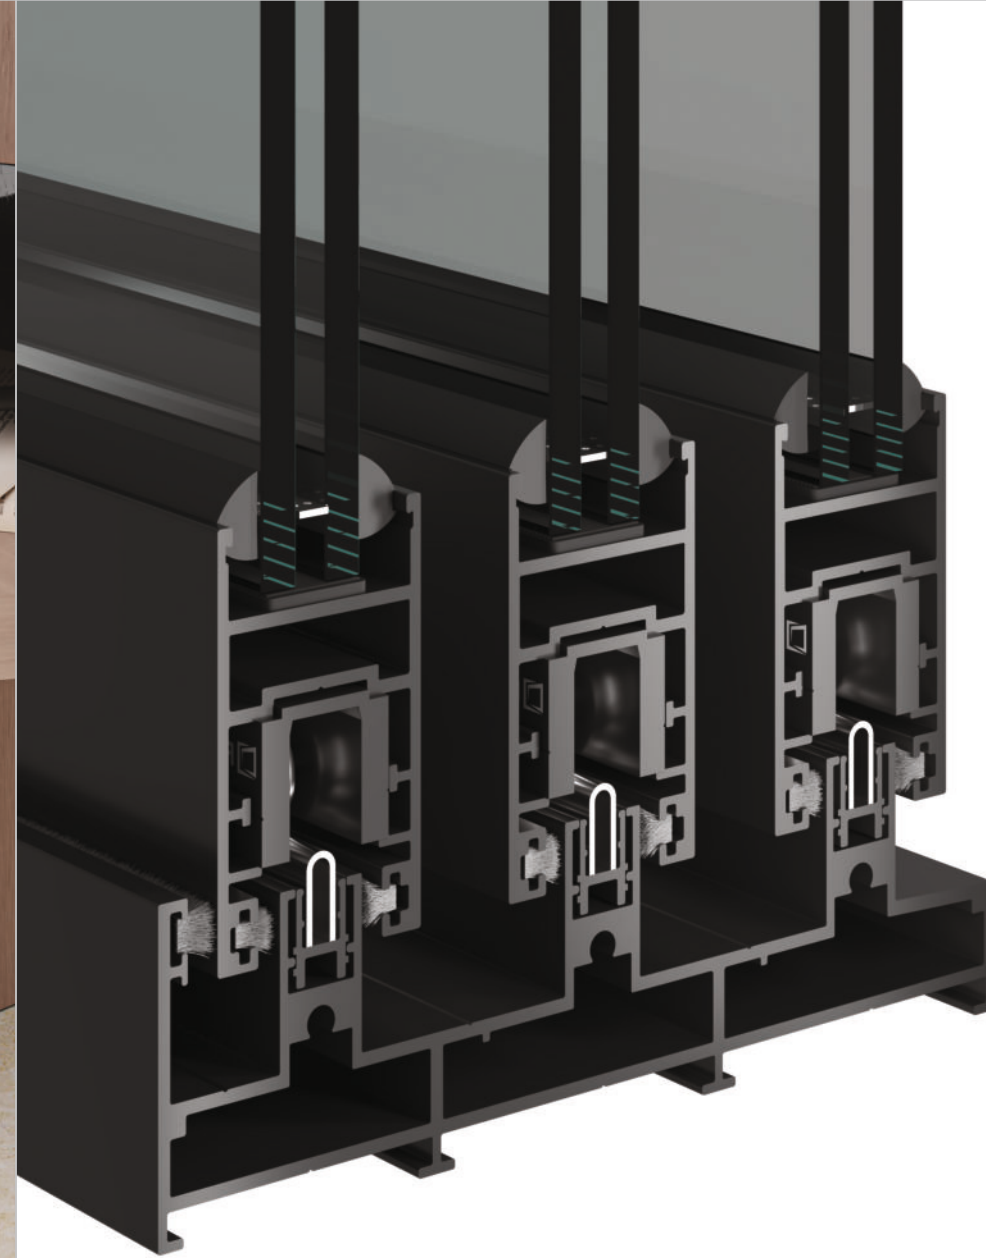






AZ 25 Gulf features a strong, refined profile that elevates any space with its clean lines and modern appeal.

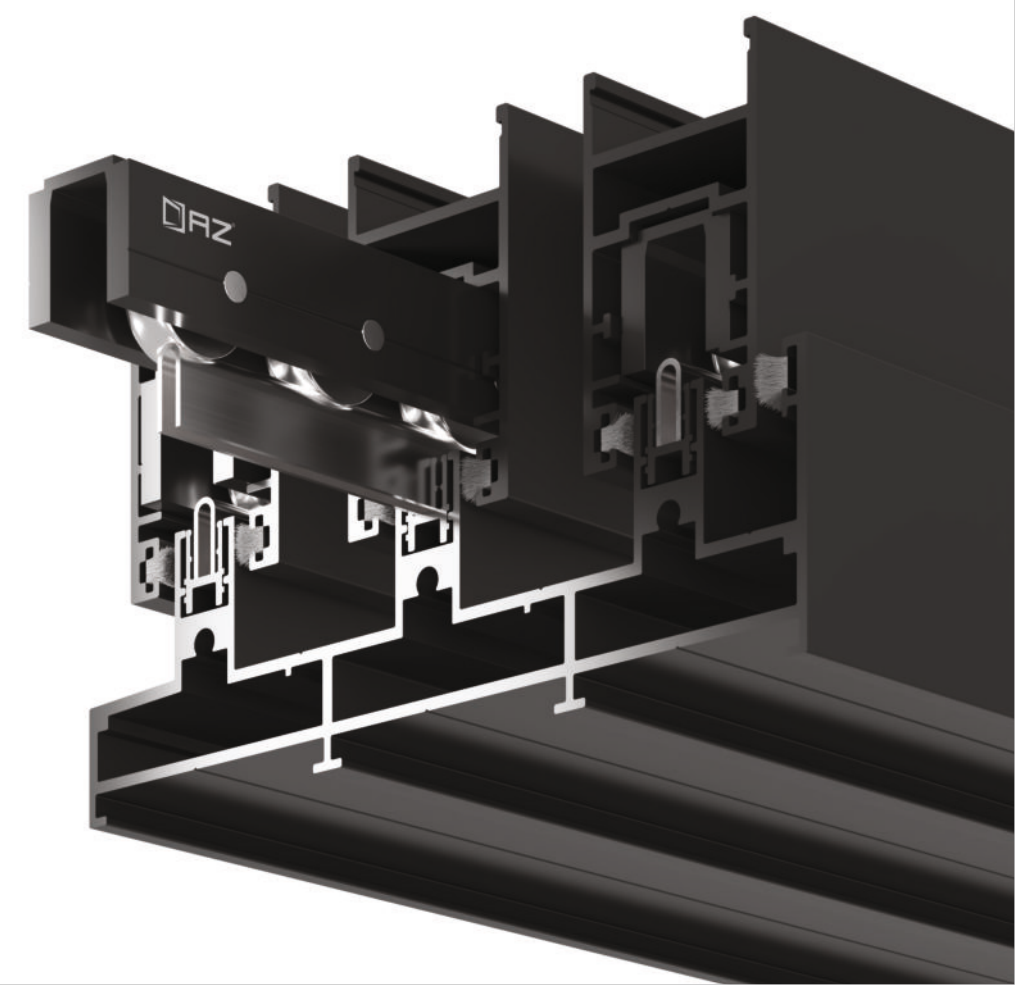

Strength and Style Combined.

A Z 25 GULF

INTER LOCK

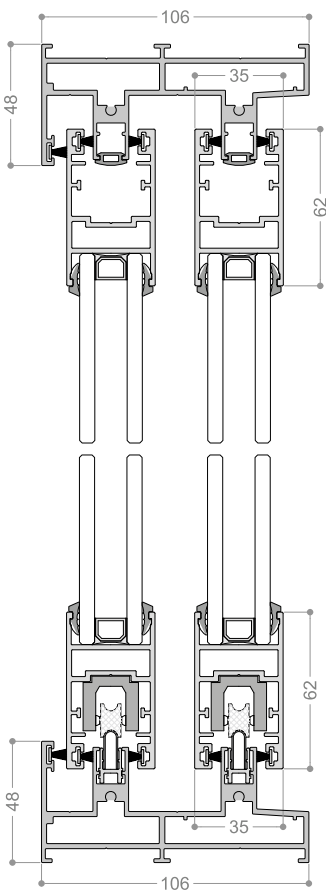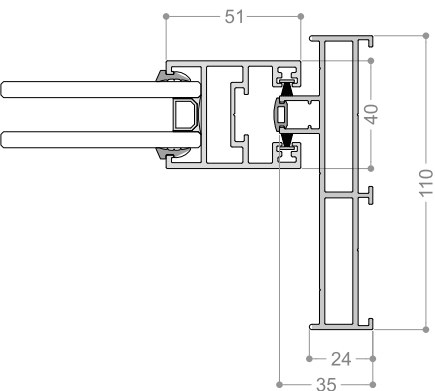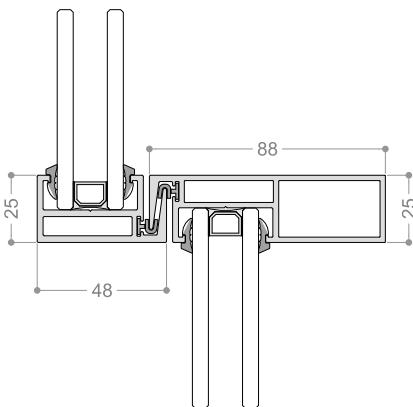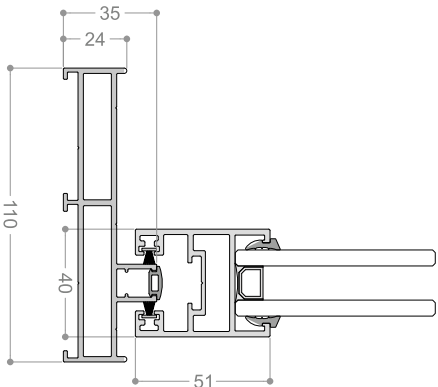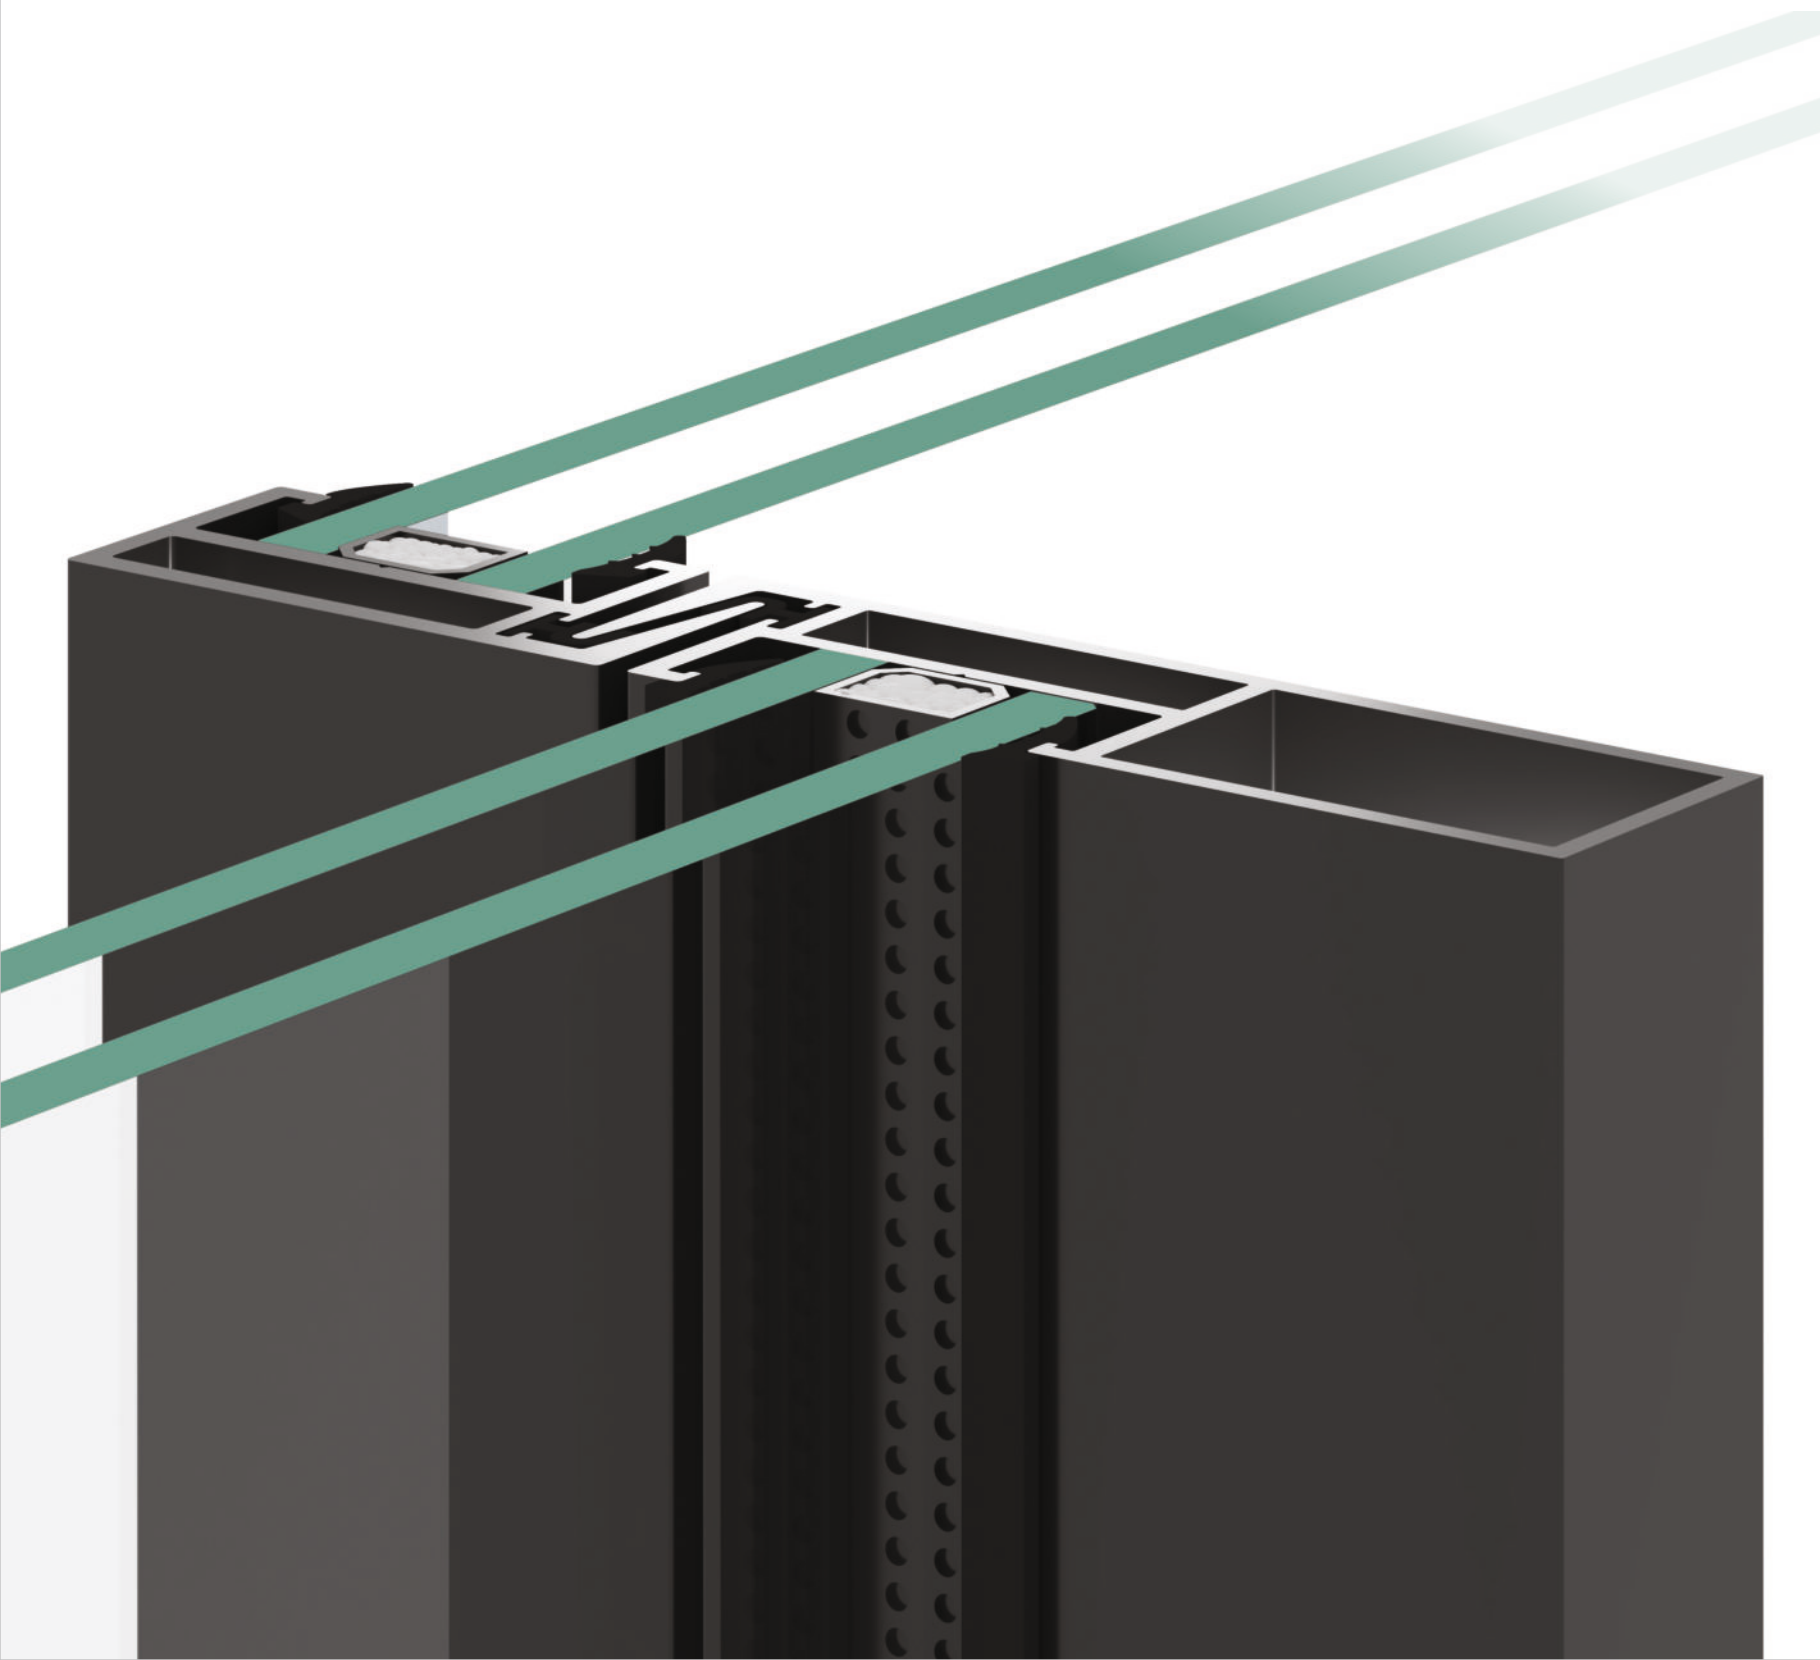


SLIDING SECTION

Profile alloy	6063
Glass thickness	08mm to 32mm
Max Height/Shutter	4300 mm
Max Weight/Shutter	450 kg
Multi Locking/Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Corner Opening	Yes
Roller Bearings	S.S. 304 Grade
Stainless Steel Rail	S.S. 304 Grade
Frame Height	48 mm
Frame Width (2T)	106 mm
Frame Width (3T)	156 mm
Sightline At Interlock (Option)	25mm
Sound Insulation	30 db
Wind Load Resistance	Up To 2.1KPa
Air Permeability	275Pa
Water Tightness	370 Pa



A Z 3 4 P A N O R A M A

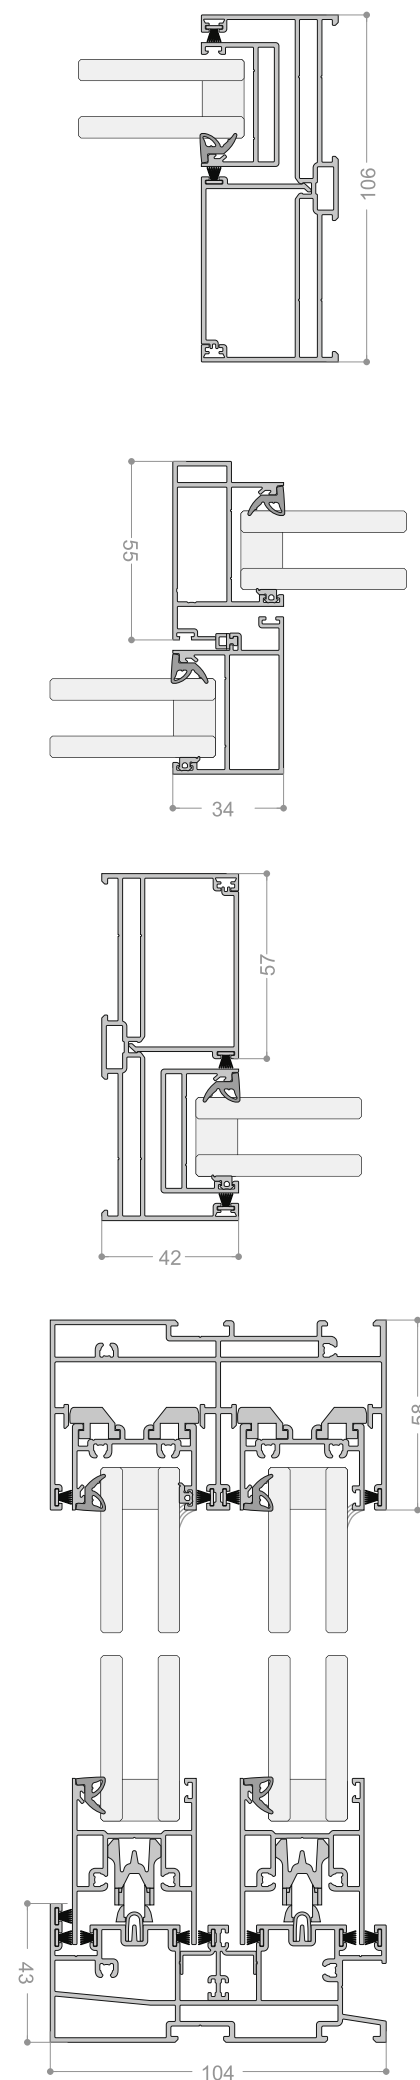

SLIDING SECTION

Profile alloy	6063
Glass thickness	20mm to 28mm
Glass Option	DGU + Lami
Max Height/Shutter	2400 mm
Max Weight/Shutter	200 kg
Locking System	yes
Mosquito Mesh Solution	yes
Roller Bearings	S.S. 304 Grade
Stainless Steel Rail	S.S. 304 Grade
Frame Height	43 mm
Frame Width (2T)	104 mm
Sightline At Interlock	34mm
Sound Insulation	30 db
Wind Load Resistance	Up To 1.5KPa
Air Permeability	250 Pa
Water Tightness	300 Pa

DESIGNED FOR VIEWS WITHOUT LIMITS.







A Z 3 0 S K Y F R A M E

A seamless blend of panoramic views and architectural precision.



Elevating Everyday Architecture

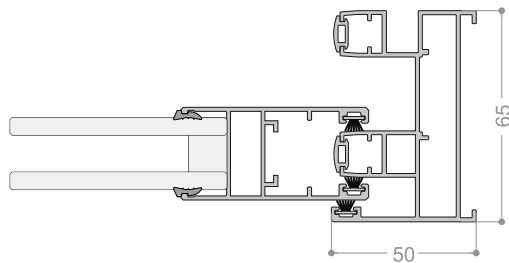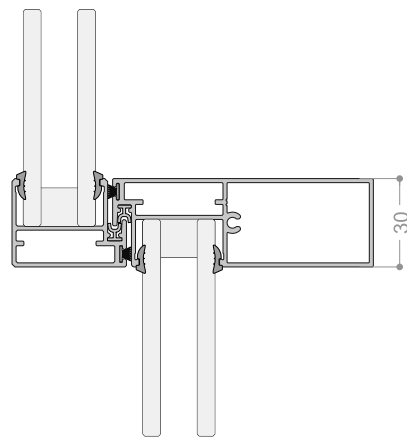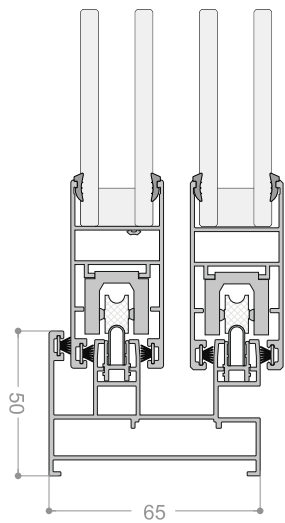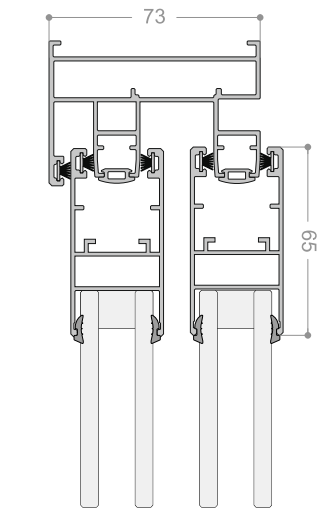

SLIDING SECTION

Profile alloy	6063
Glass thickness	6mm to 24mm
Max Height/Shutter	3600 mm
Max Weight/Shutter	400 kg
Multi Locking / Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Center Opening	Yes
Roller Bearings	S.S. 304 Grade
Stainless Steel Rail	S.S. 304 Grade
Frame Height	50 mm
Frame Width (2T)	73 mm
Frame Width (3T)	115 mm
Sightline At Interlock	30 mm
Sound Insulation	30 db
Wind Load Resistance	Up To 2.1 KPa
Air Permeability	275 Pa
Water Tightness	370 Pa


STREAMLINED FOR MODERN LIVING.



A Z 1 5 S L I M


Minimal design that enhances any architectural space while maximizing natural light. Its refined profiles provide a perfect blend of modern aesthetics and superior performance.






AZ 15 SLIM INTER LOCK

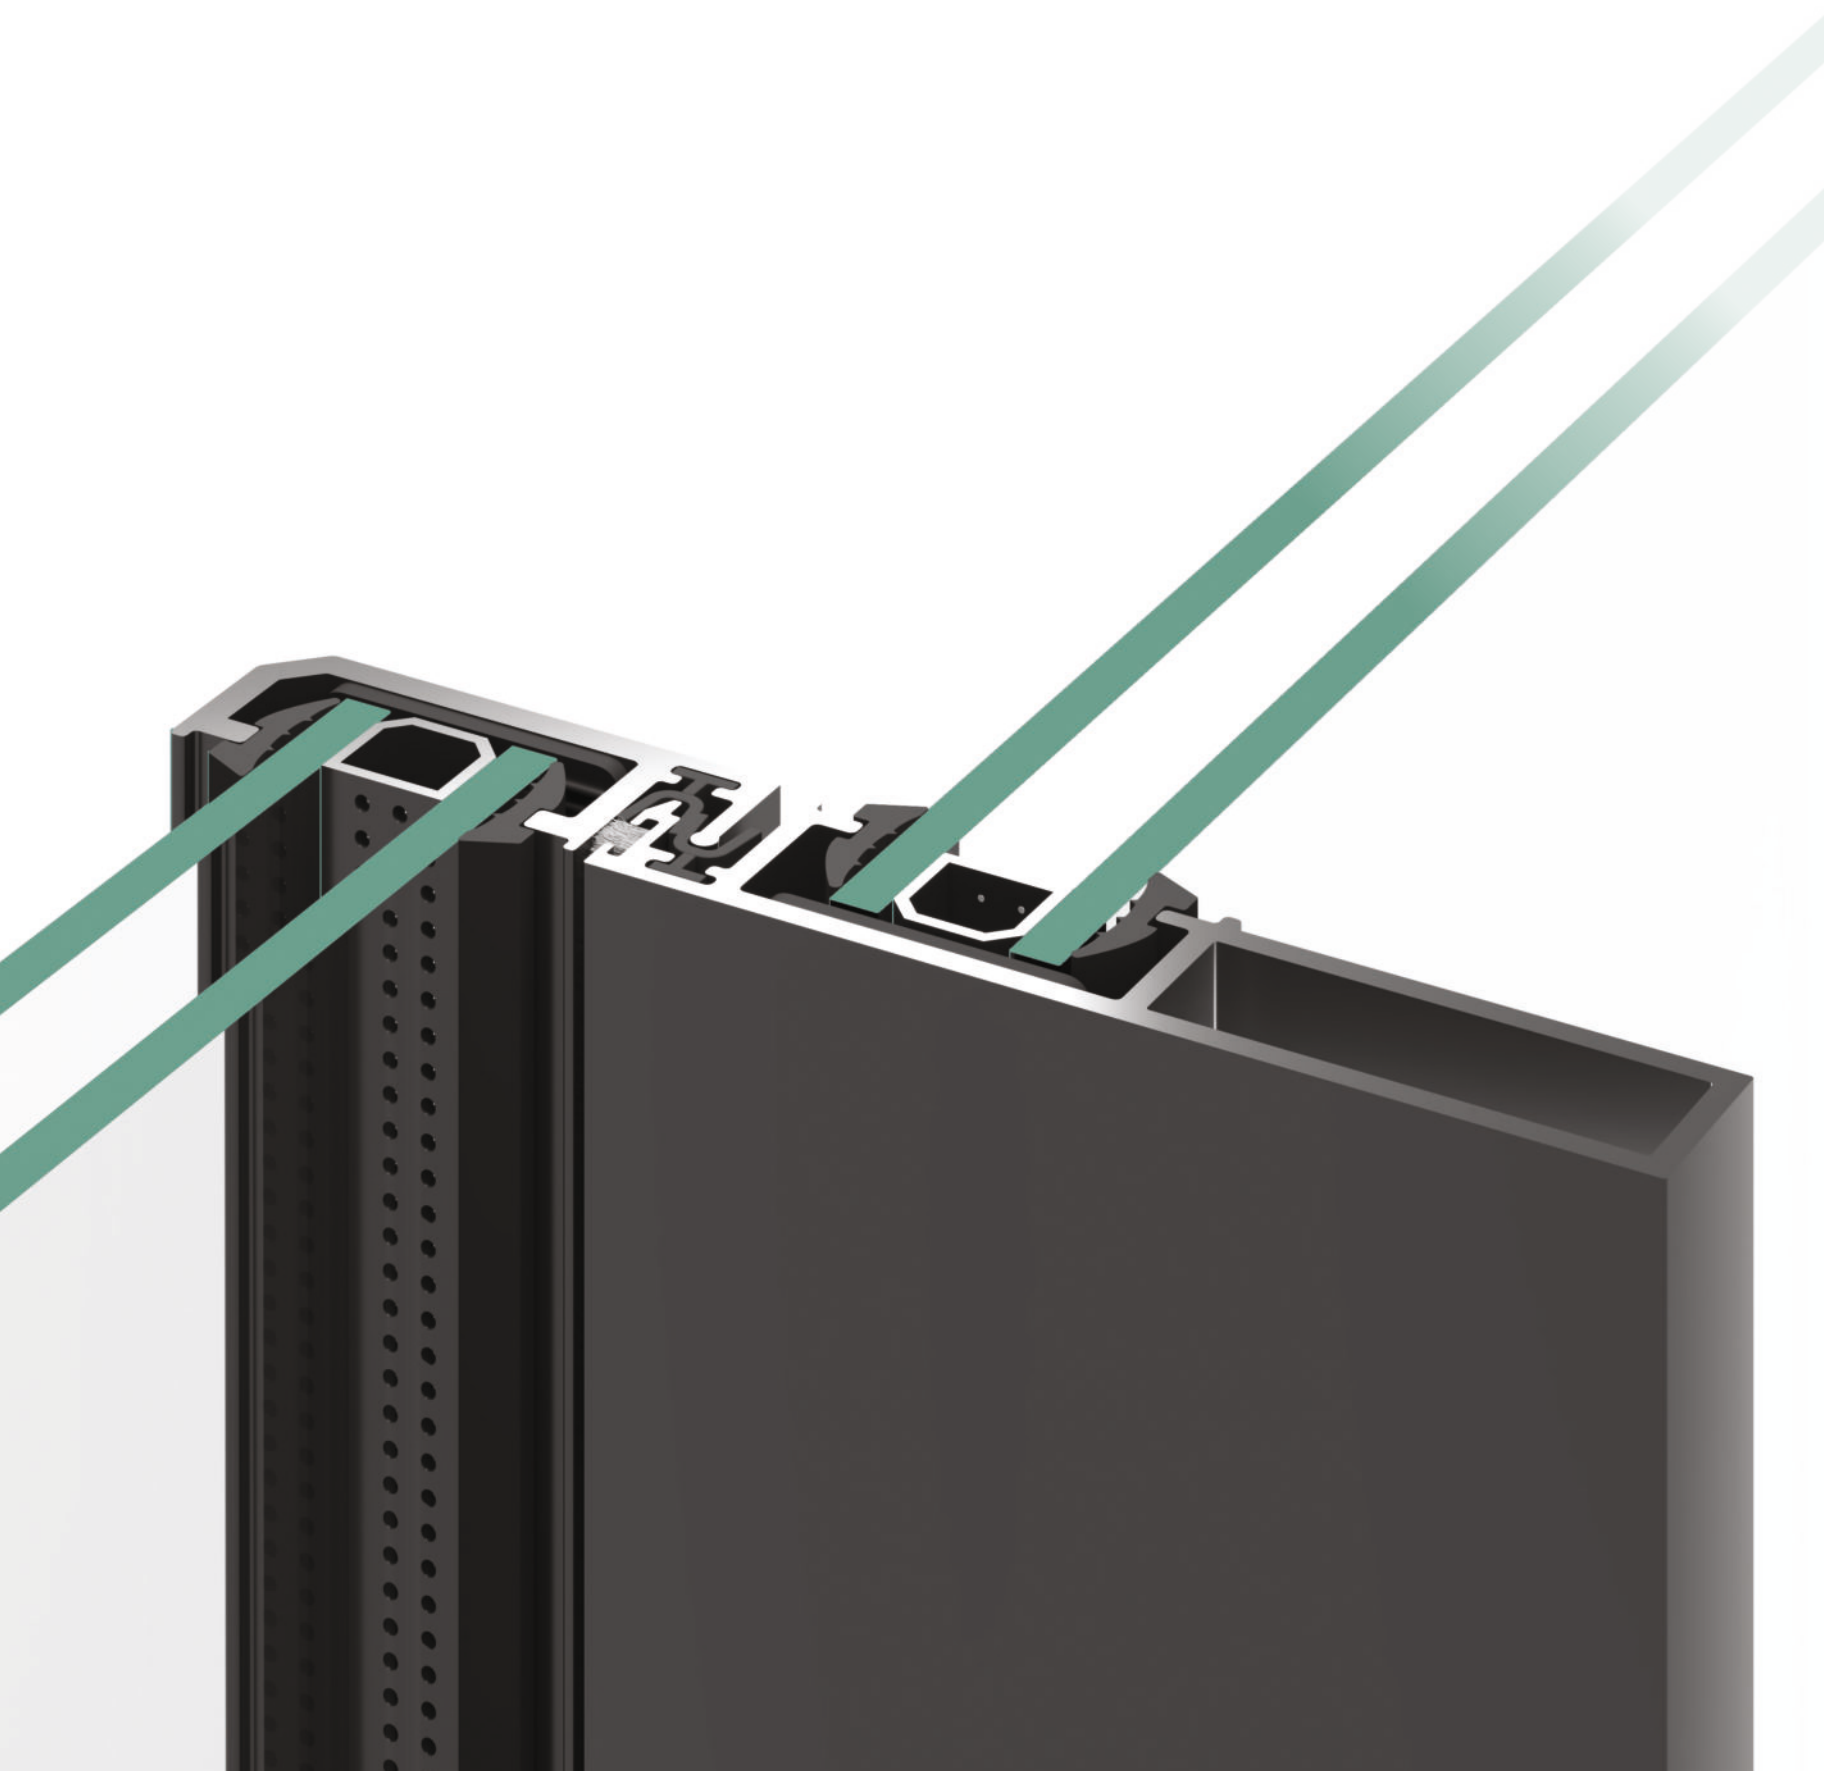

INSIDE CONCEALED

The AZ 15 Slim series boasts an innovative inside concealed design, ensuring a clean, seamless look from every angle. It perfectly balances modern elegance with practical functionality

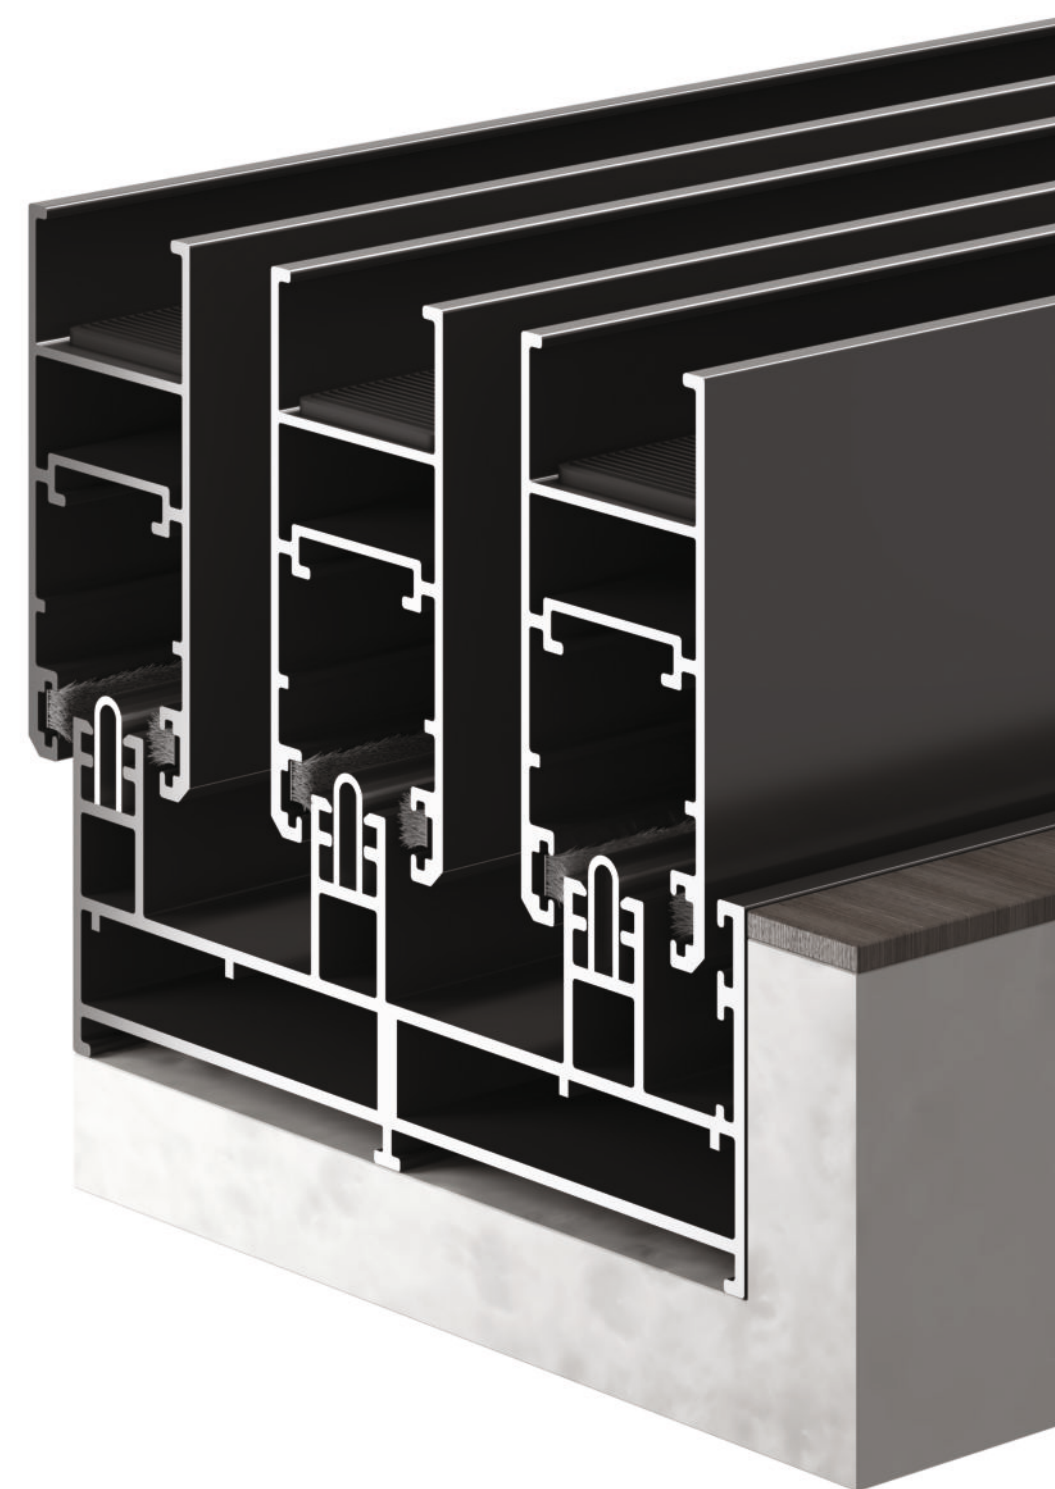

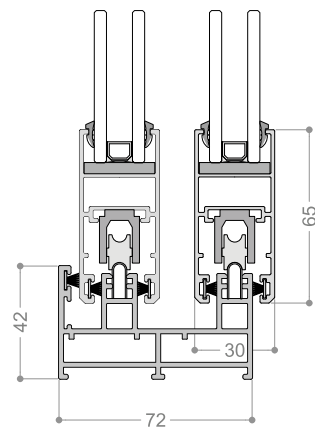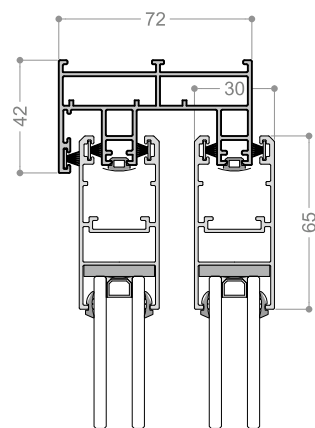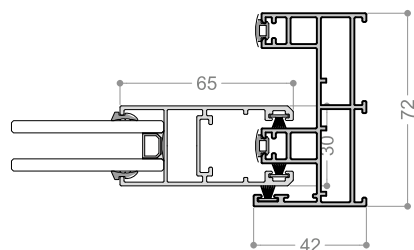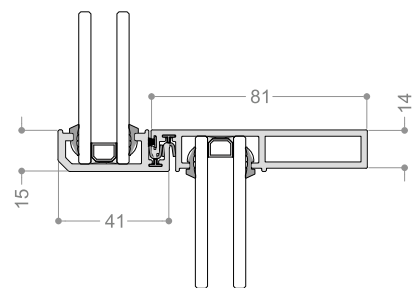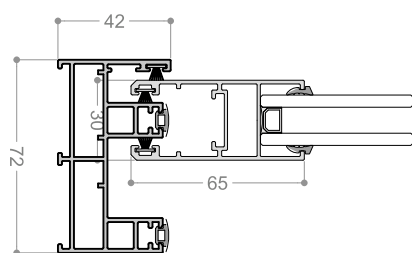

SLIDING SECTION

Profile alloy	6063
Glass thickness	06mm to 20mm
Max Height/Shutter	3200 mm
Max Weight/Shutter	350 kg
Multi Locking/Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Corner Opening	Yes
Roller Bearings	S.S. 304 Grade/Nylon
Stainless Steel Rail	Yes

Frame Height	43 mm
Frame Width (2T)	72 mm
Frame Width (3T)	115 mm
Frame Width (4T)	158 mm
Sightline At Interlock (Option)	15mm, 25mm, 65mm

Sound Insulation	30 db
Wind Load Resistance	Up To 2KPa
Air Permeability	250Pa
Water Tightness	340Pa



Designed to Disappear, Built to Impress.




MAXIMIZE LIGHT,
MINIMIZE FRAME.

PRIME STRENGTH, SLEEK DESIGN.








A Z 2 0 P R I M E

Designed with a sturdy profile, AZ 20 Prime ensures long-lasting performance with a touch of sophistication.

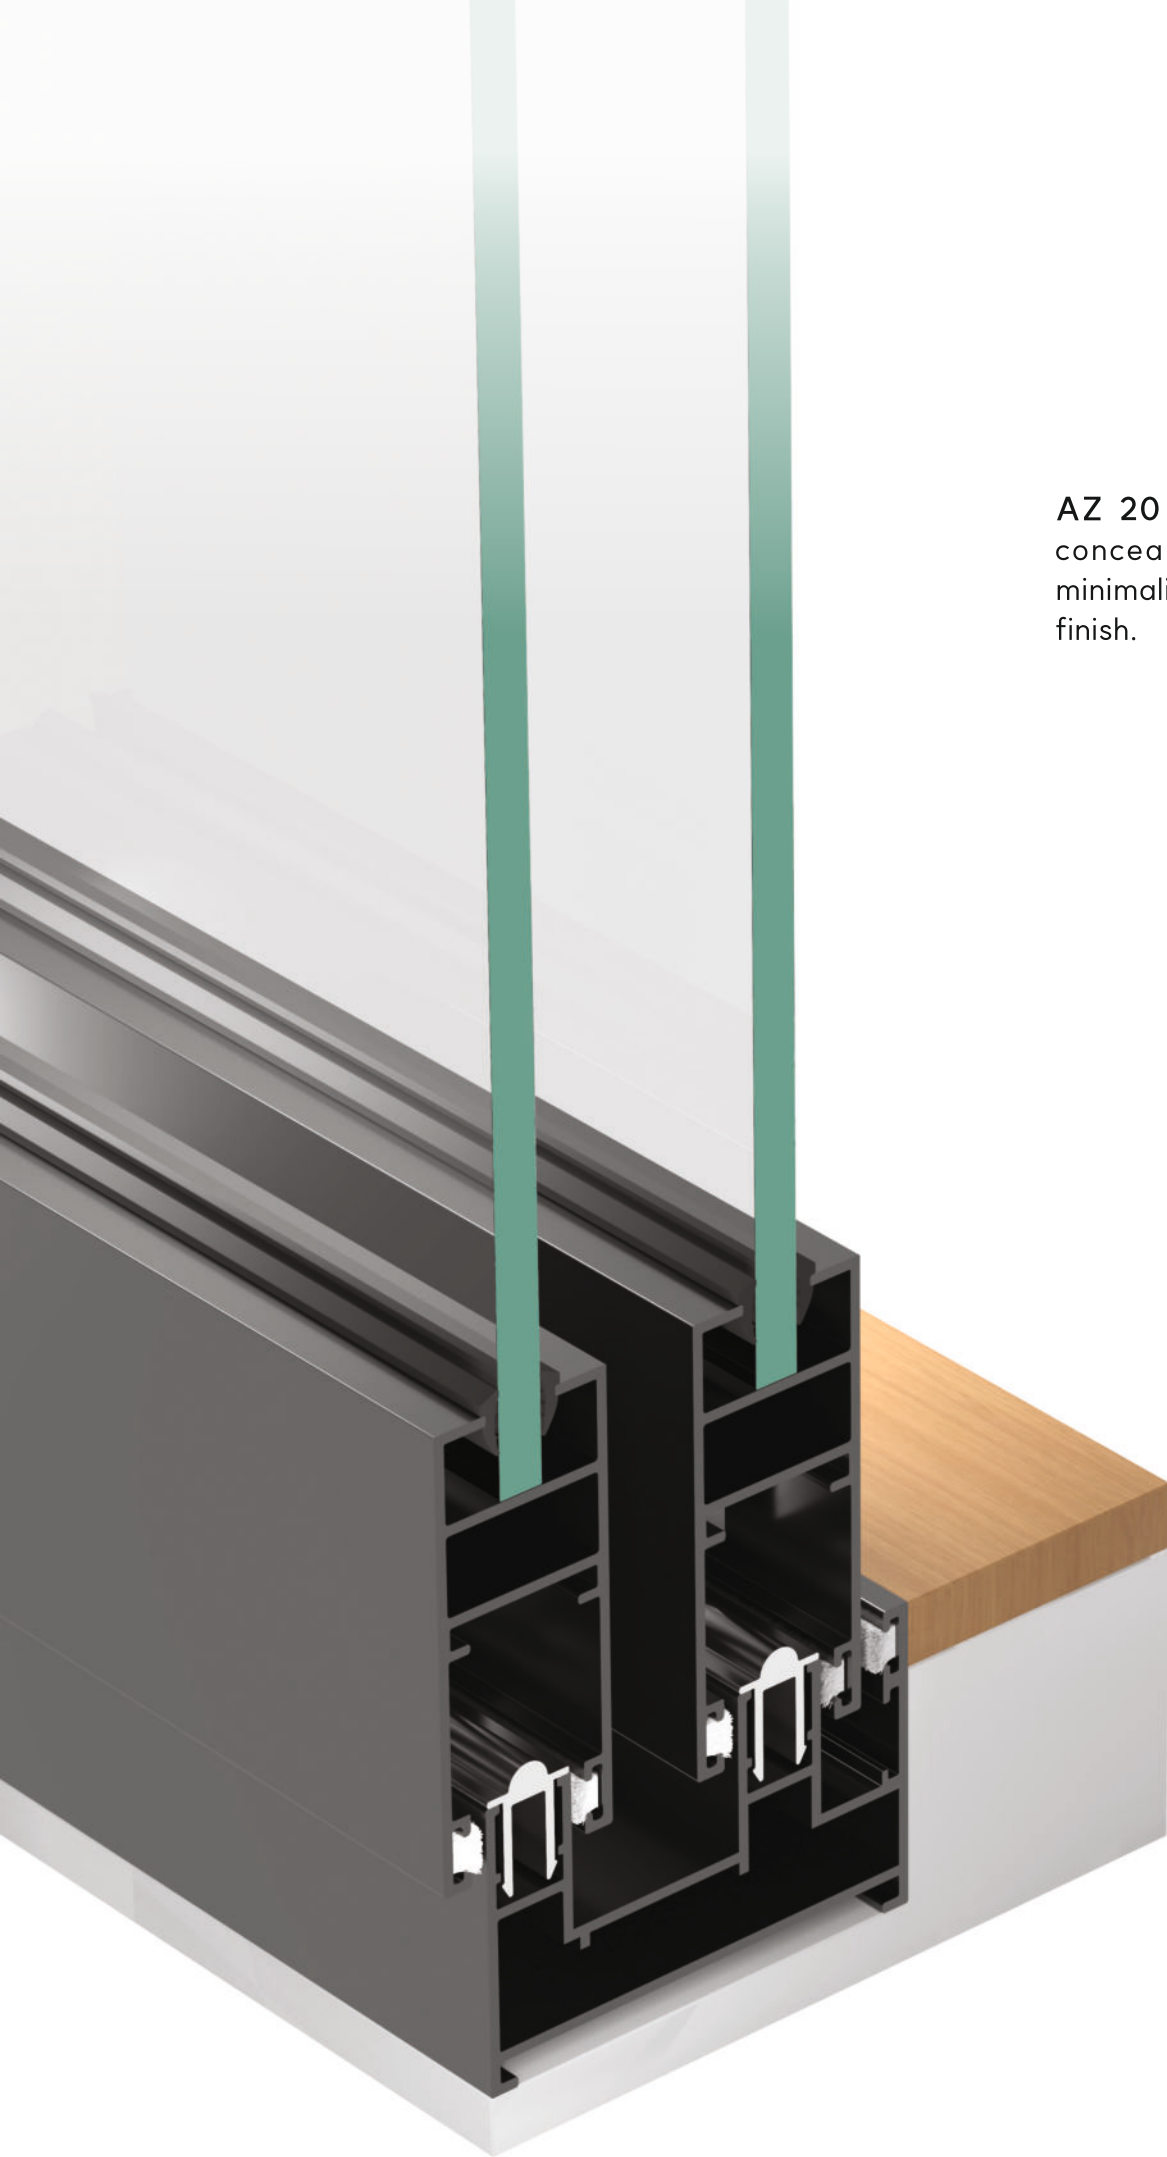

AZ 20 Prime with its inside concealed feature ensures a minimalist and polished interior finish.

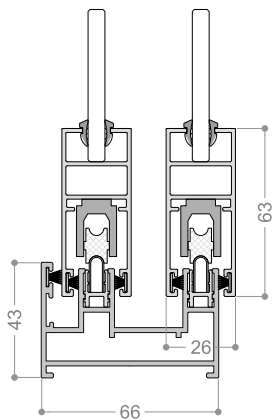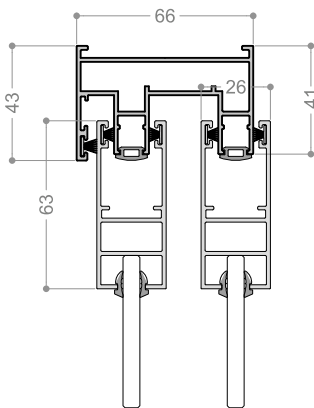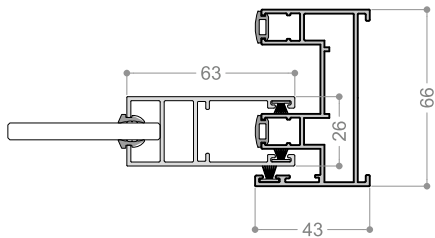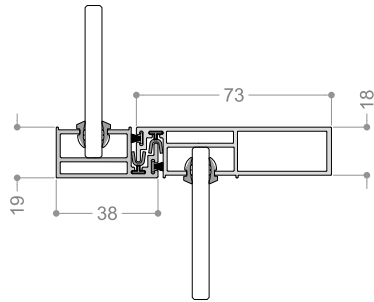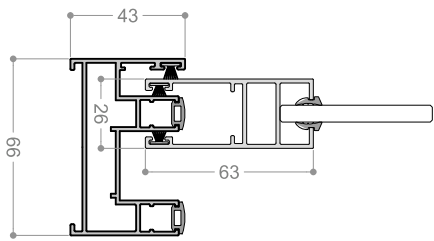


SLIDING SECTION

Profile alloy	6063
Glass thickness	05mm to 18mm
Max Height/Shutter	3000 mm
Max Weight/Shutter	250 kg
Multi Locking/Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Corner Opening	Yes
Roller Bearings	S.S. 304 Grade/Nylon
Stainless Steel Rail	Yes
Frame Height	43 mm
Frame Width (2T)	66 mm
Frame Width (3T)	105 mm
Sightline At Interlock (Option)	25mm, 65mm
Sound Insulation	25 db
Wind Load Resistance	Up To 1.8KPa
Air Permeability	230Pa
Water Tightness	320 Pa

AZ 20 PRIME INTER LOCK








Built to Last, Beautifully

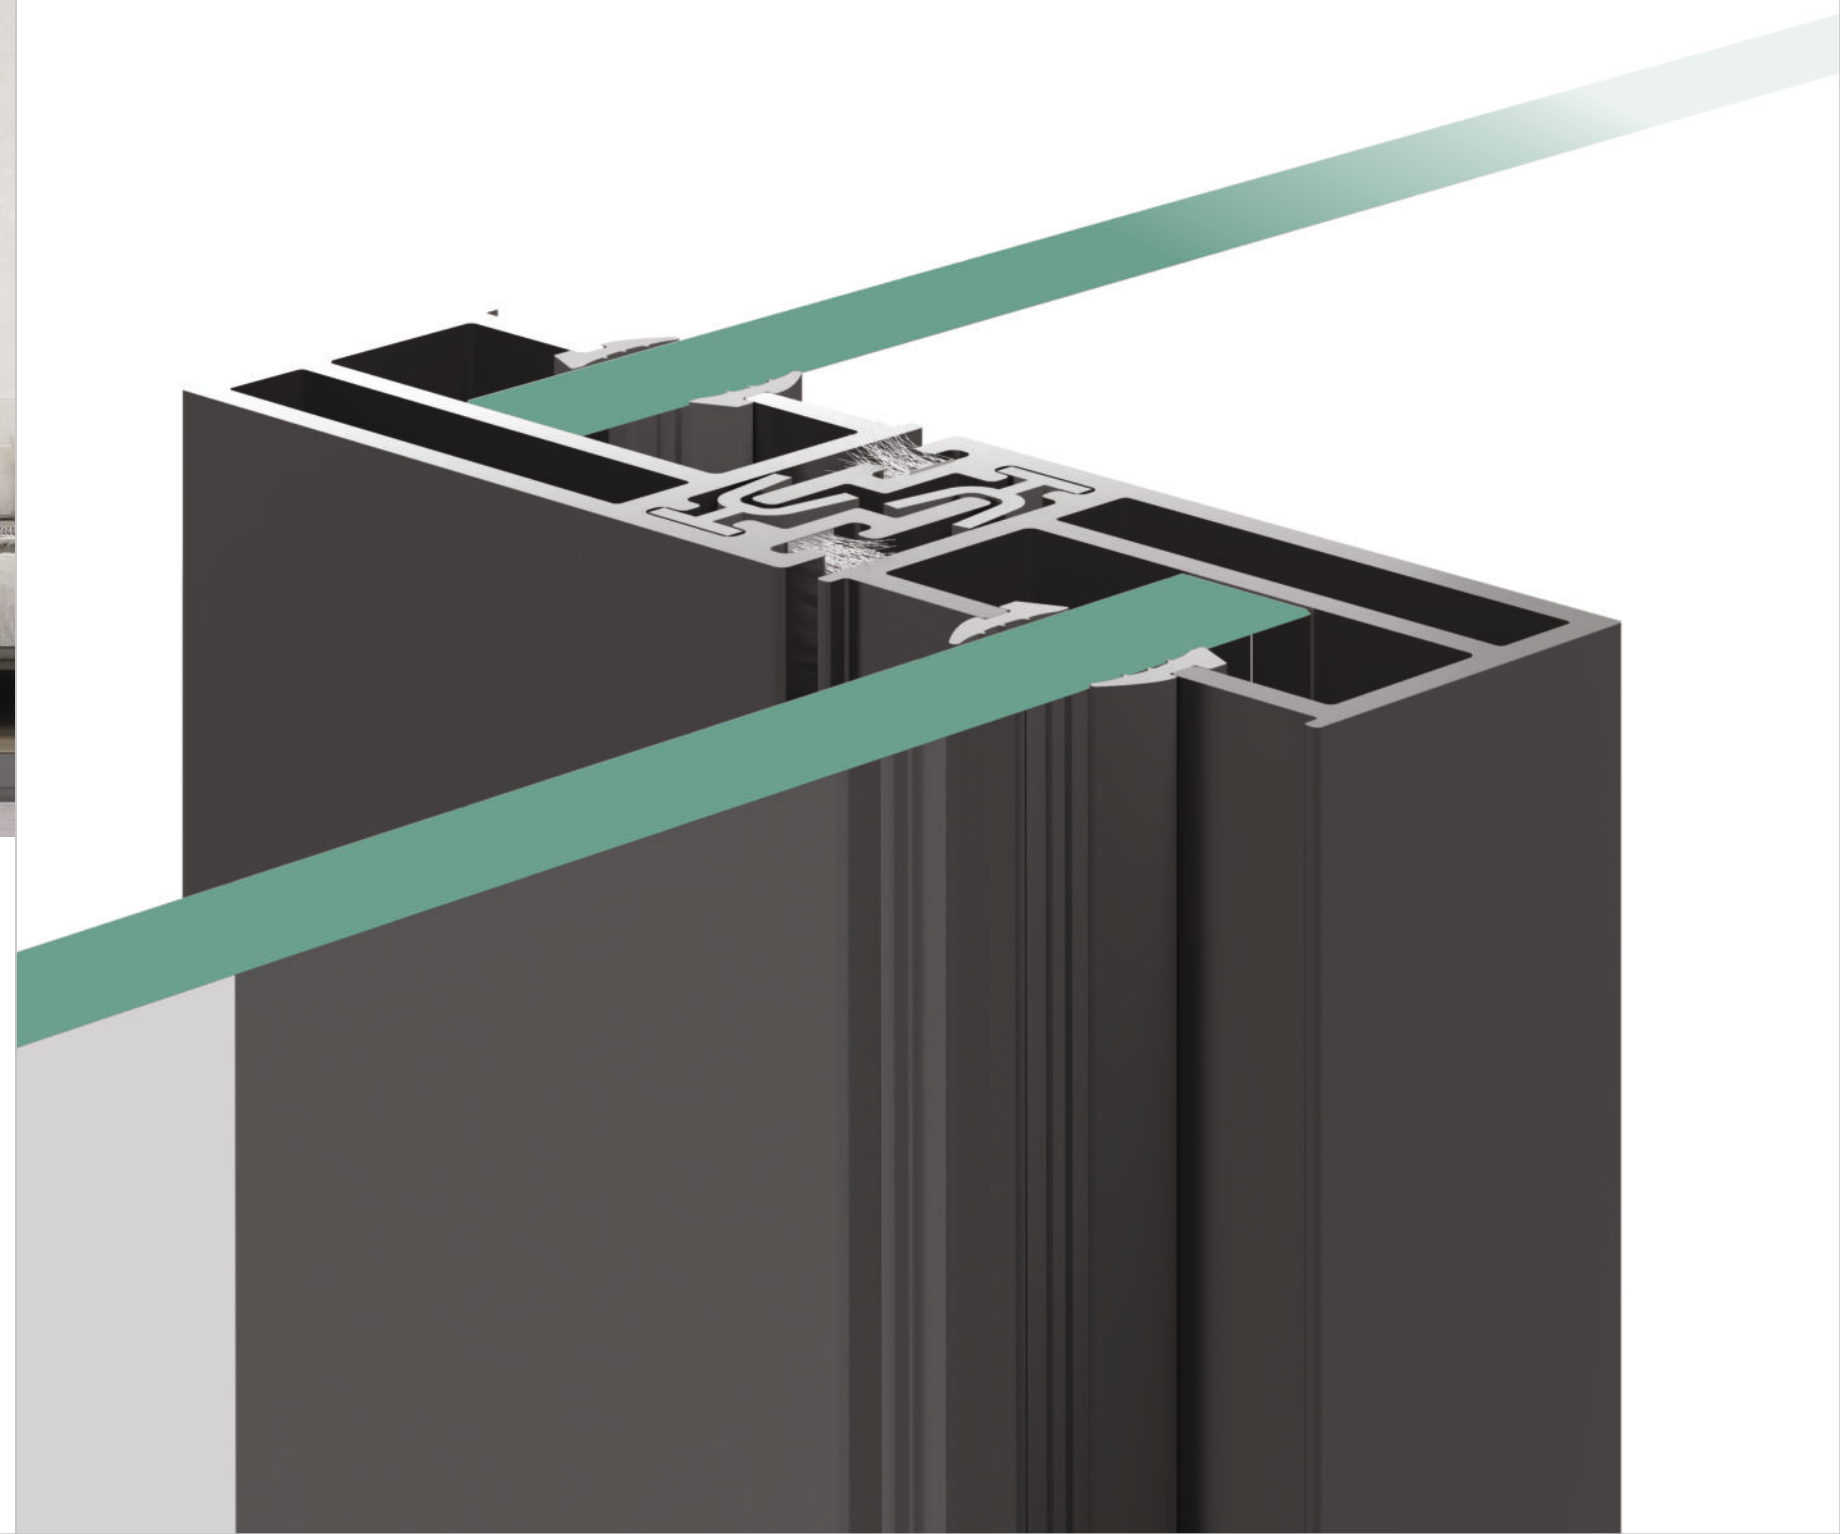



2 5 G R I L L E D

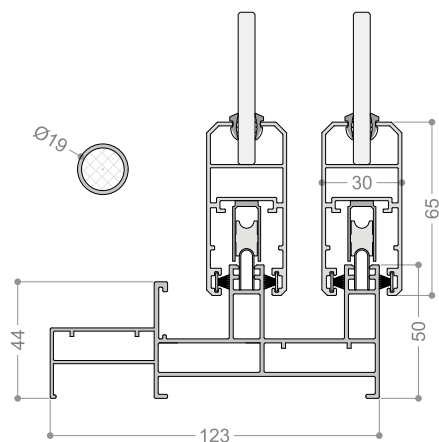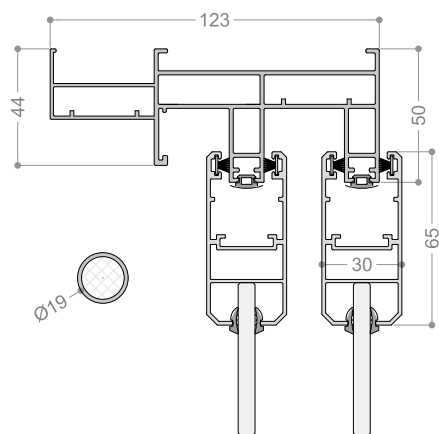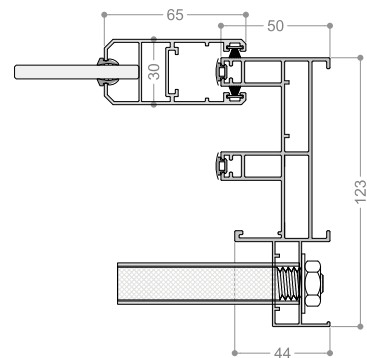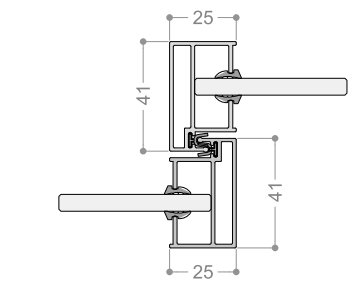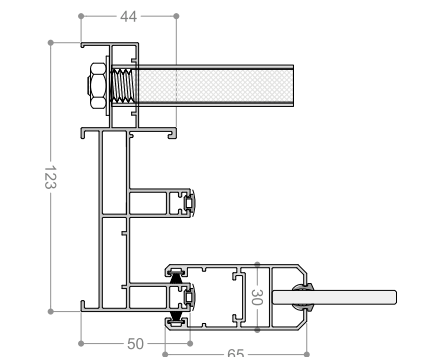

SLIDING SECTION

Profile alloy 6063

Glass thickness 06mm to 20mm

Glass Option Single/Laminate/DGU

Max Height/Shutter 2400 mm

Max Weight/Shutter 150 kg

Multi Locking/Single Point Locking Yes

Mosquito Mesh Solution Yes

Roller Bearings S.S. 304 Grade/Nylon

Stainless Steel Rail Yes

Frame Height 50 mm

Frame Width (2T) 123 mm

Sightline At Interlock 25 mm

Sound Insulation 25 db

Wind Load Resistance Up To 1.5KPa

Air Permeability 200Pa

Water Tightness 280 Pa







Designed to stand the test of time, this casement door brings a fresh and timeless aesthetic to your home.





A Z 5 9 M M F I N E L I N E

OPENABLE SECTION

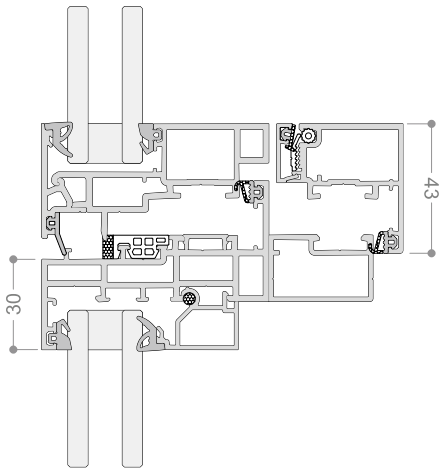
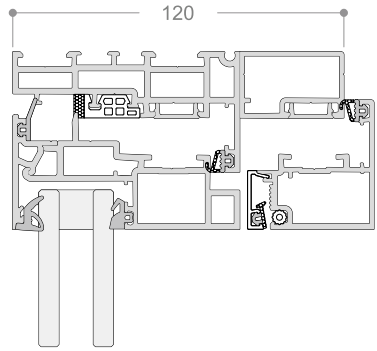
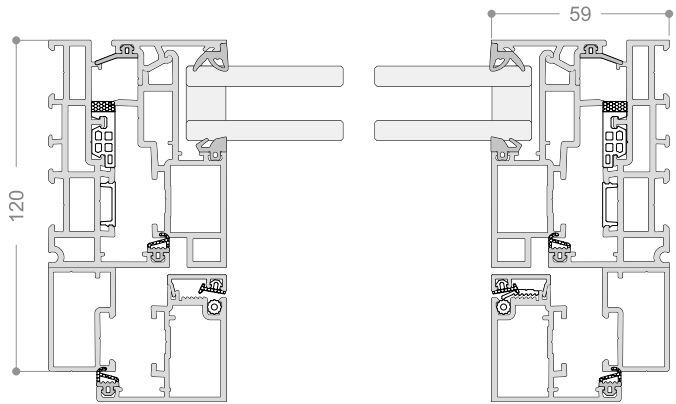


Profile alloy	6063
Glass thickness	22mm to 30mm
Glass Option	DGU / Dgu Laminate
Sound Reduction	Up to 35 db
Max Width/Shutter	950 mm
Max Height/Shutter	2100 mm
Max Weight/Shutter	150 kg
Bottom Frame	Yes
Multi Locking	Yes
Mosquito Mesh Solution	Openable In frame
Hinge	Euro Concealed
Hinge Glass shutter Opening	Outside
Mesh Opening	Inside
Frame Height	40 mm
Frame Width	75 mm
Frame width With Mesh Frame	110 mm
Glass Shutter	75mm X 38mm
Mesh Shutter	42mm X 43mm



W 4 0 C A S E M E N T




OPENABLE SECTION

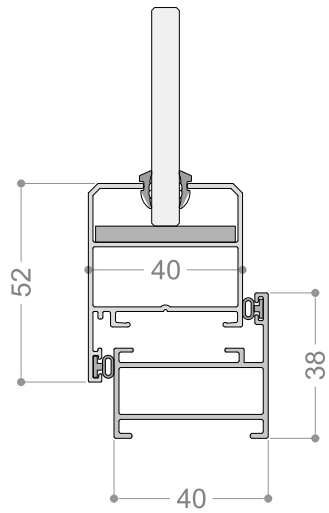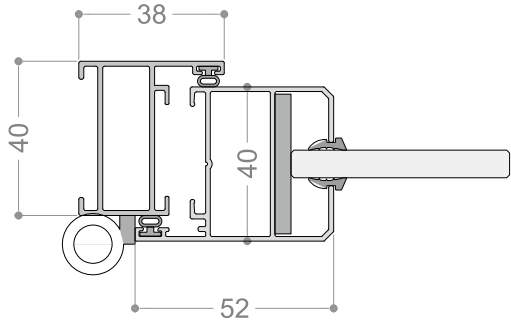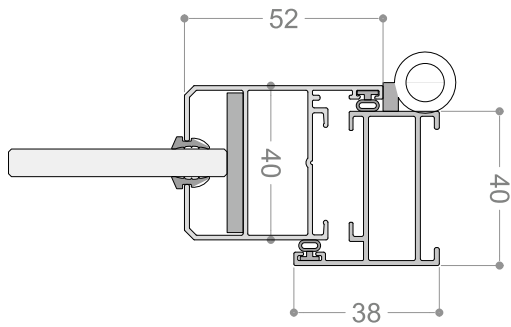

Profile alloy	6063
Glass thickness	05mm to 18mm
Max Width/Shutter	800mm
Max Height/Shutter	2100mm
Max Weight/Shutter	40 kgs
Single/Multi Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt/Friction
Opening	Side Hung/Top Hung
Frame Height	40 mm
Frame Width	40 mm
Shutter	40mm X 52mm
Mullion Sightline with Shutter	134mm



W 4 5 C A S E M E N T

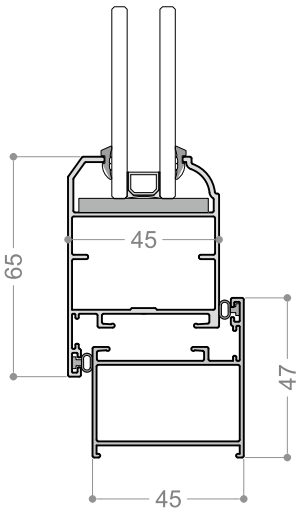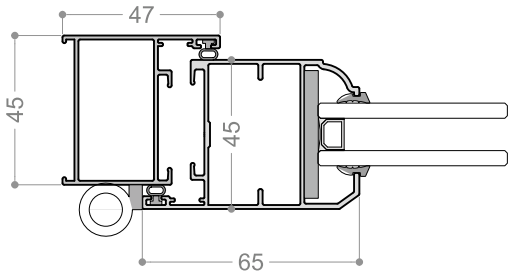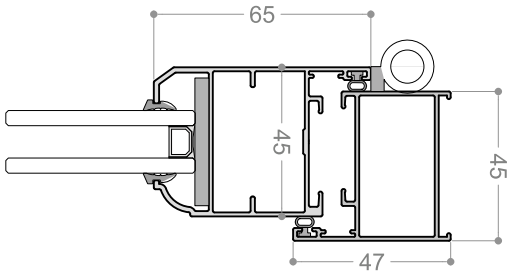



OPENABLE SECTION

Profile alloy	6063
Glass thickness	05mm to 20mm
Max Width/Shutter	900mm
Max Height/Shutter	2400mm
Max Weight/Shutter	60 kgs
Single/Multi Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt/Friction
Opening	Side Hung/Top Hung
Frame Height	48 mm
Frame Width	45 mm
Shutter	45mm X 65mm
Mullion Sightline with Shutter	165mm



W 5 0 C A S E M E N T




OPENABLE SECTION

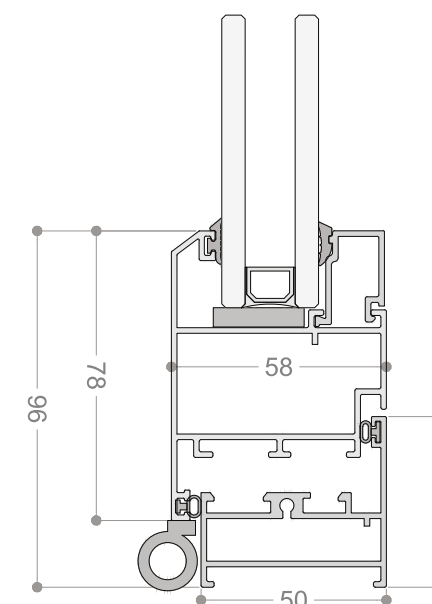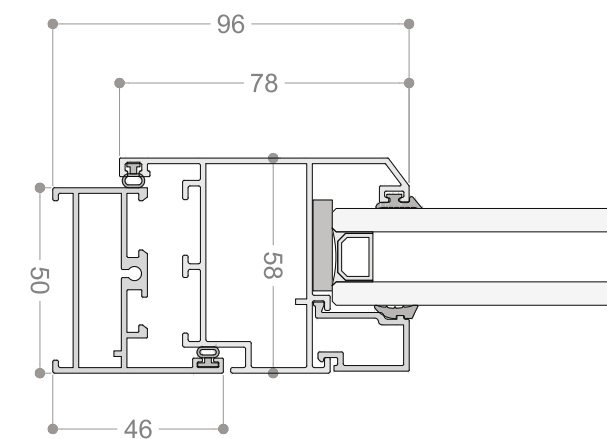

Profile alloy	6063
Glass thickness	05mm to 38mm
Glass Option	Single/Laminate/DGU/DGU Laminate/ Inside Blind
Sound Reduction	Up to 30 db
Max Width/Shutter	900mm
Max Height/Shutter	2700mm
Max Weight/Shutter	120 kgs
Bottom Frame	Yes/No
Multi Locking / Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt/Friction
Opening	Side Hung/Top Hung
Frame Height	46 mm
Frame Width	50 mm
Shutter	58mm X 78mm
Mullion Sightline with Shutter	170mm



D 5 0 C A S E M E N T

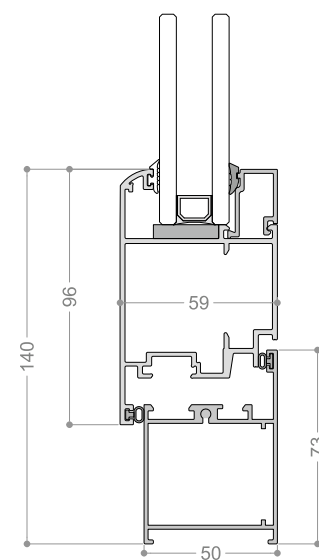
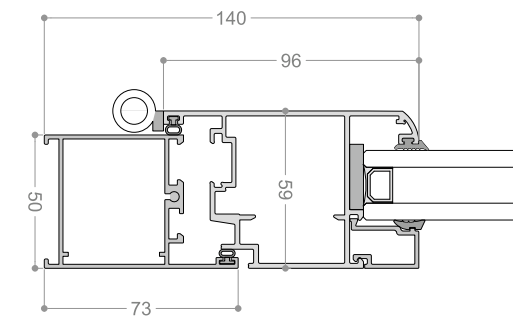
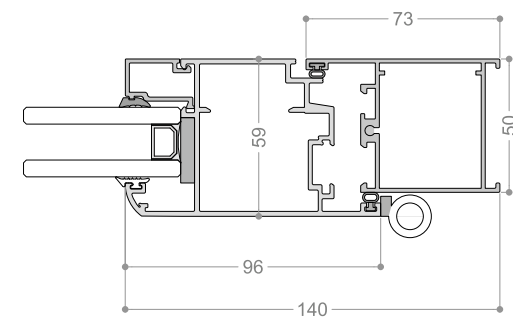


OPENABLE SECTION

Profile alloy	6063
Glass thickness	08mm to 38mm
Glass Option	Single/Laminate/DGU/DGU Laminate/ Inside Blind
Sound Reduction	Up to 30 db
Max Width/Shutter	1200mm
Max Height/Shutter	3000mm
Max Weight/Shutter	160 kgs
Bottom Frame	Yes/No
Multi Locking / Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt
Opening	In/Out
Frame Height	72 mm
Frame Width	50 mm
Shutter	58mm X 96mm



8 2 G R I L L E D

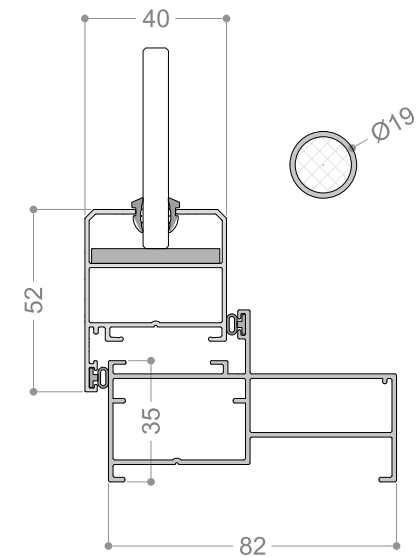
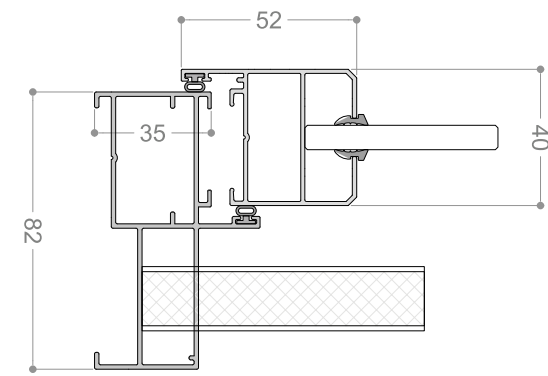
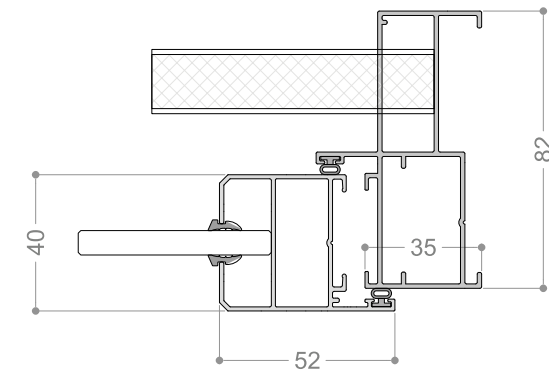


OPENABLE SECTION

Profile alloy	6063
Glass thickness	05mm to 18mm
Security Option	Safety Grill (With 16mm MS Bright Bar)
Max Width/Shutter	750mm
Max Height/Shutter	2100mm
Max Weight/Shutter	40 kgs
Multi Locking / Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt/Friction
Opening	Side Hung/Top Hung
Frame Height	49mm
Frame Width	82 mm
Shutter	40mm X 52mm
Mullion Sightline with Shutter	134mm



1 1 4 G R I L L E D



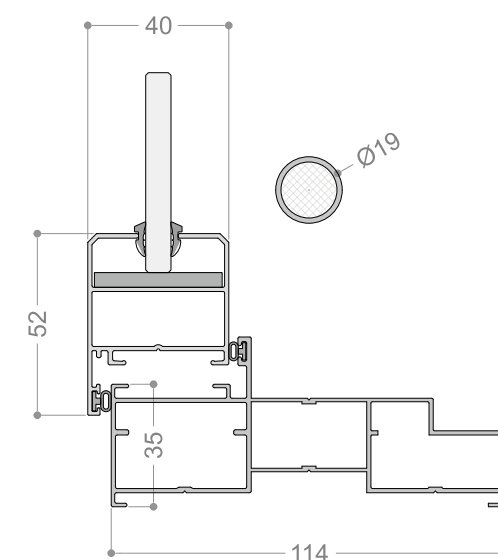
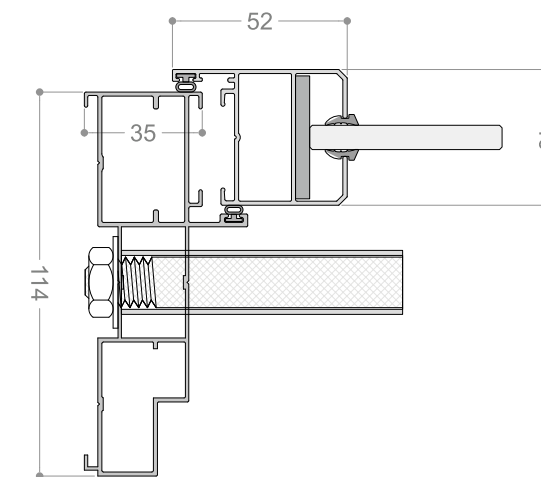
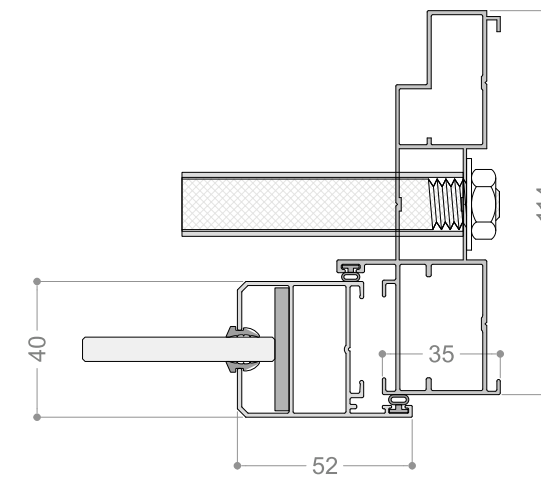


OPENABLE SECTION

Profile alloy	6063
Glass thickness	05mm to 18mm
Security Option	Safety Grill (With 16mm MS Bright Bar)
Max Width/Shutter	750mm
Max Height/Shutter	2100mm
Max Weight/Shutter	40 kgs
Multi Locking / Single Point Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	Butt/Friction
Opening	Side Hung/Top Hung
Frame Height	49mm
Frame Width	114 mm
Shutter	40mm X 52mm
Mullion Sightline with Shutter	134mm



AZ 70 SLIDING - FOLDING

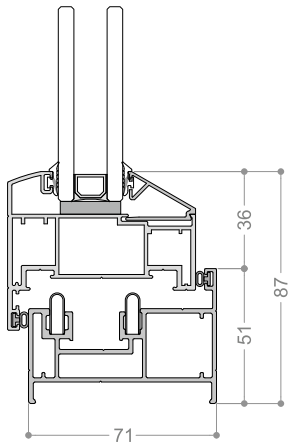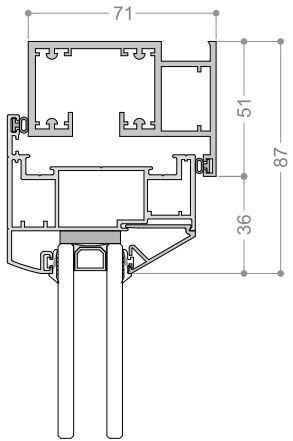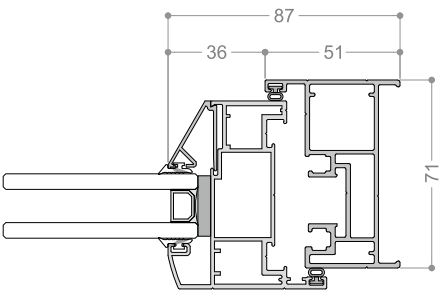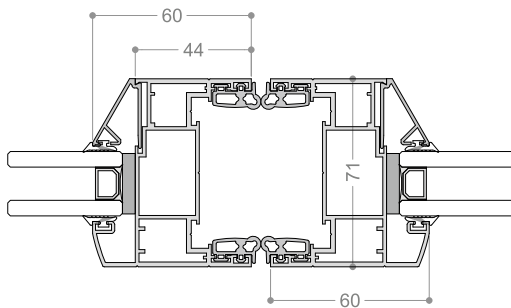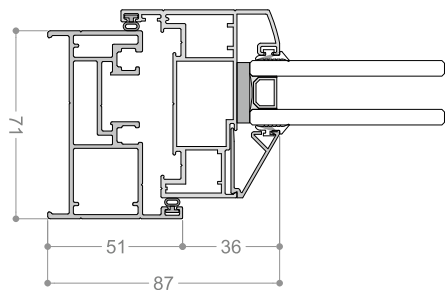

SLIDING - FOLDING
SECTION


Profile alloy	6063
Glass thickness	06mm to 32mm
Security Option	16mm S.S. Shoot Bolt
System	
Max Width/Shutter	900mm
Max Height/Shutter	3300mm
Max Weight/Shutter	150 kgs
Multi Locking	Yes
Mosquito Mesh Solution	Yes
Hinge	S.S. 304 Grade
Opening	Inside/Outside
Stainless Steel Rail	Double S.S. 304 Rail
Frame Height	70mm INSIDE X 50mm OUTSIDE
Frame Width	70mm
Shutter	60mm X 79mm
Sightline At Shutter	125mm
Sound Insulation	35 db
Wind Load Resistance	Up to 1.2 Kpa
Air Permeability	600 Pa
Water Tightness	600 Pa



AZ LOUVERS WINDOW




LOUVERS SECTION

Profile alloy	6063
Max Frame Width	950mm
Max Frame Height	2400mm
Locking	Yes
Mosquito Mesh Solution	Yes

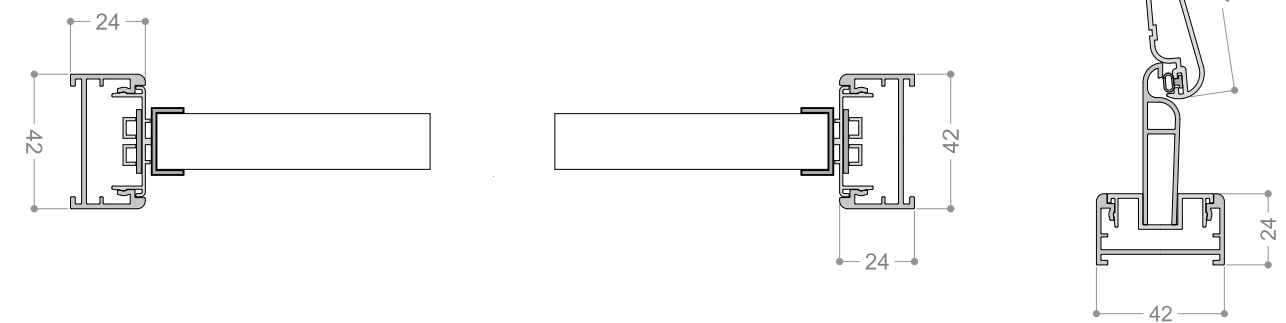



A Z 20 FACADE

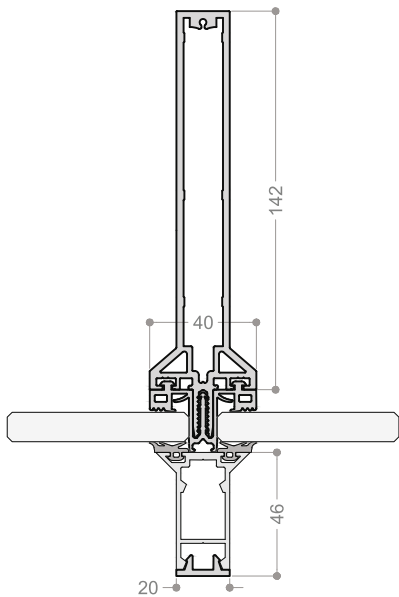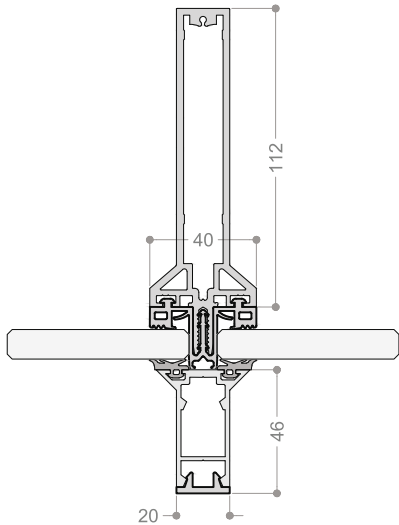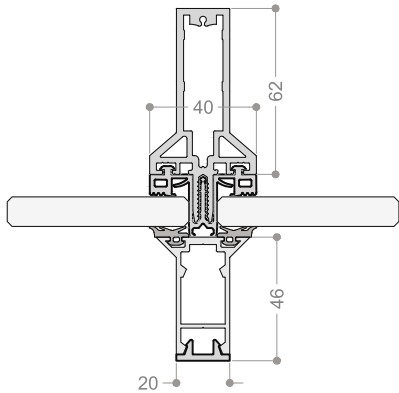

FACADE SECTION

Profile alloy	6063
Glass thickness	08mm to 40mm
Glass Option	Single / Laminate DGU / Dgu Laminate
Sound Reduction	Up to 40 db
Min. Visible Width (Interior View)	20mm
Min. Visible Width (Exterior View)	20mm
Mullion Depth Option	80mm, 130mm, 160mm
Reinforcement Option	Option Steel Reinforcement in Case of High Wind Load
Wind Load Resistance	Up to 1.5 Kpa
Air Permeability	700pa
Water Tightness	650pa